

# SERENITY 42 – SERENITY SERIES

inches (mm)

65 x 32 ¼ x 31 ½ (1650 x 820 x 800) • Fax on Demand #1262

SOAKER MODEL #AI42COPNIKTO

AIR BATH MODEL #AI42AIRCOPNIK



Note: This model requires a remote blower location. Please refer to the owners manual for detailed installation instructions.

## FEATURES

- Copper bath
- Deep bathing well
- Nickel interior
- Freestanding waste and overflow: Oil-Rubbed Bronze
- Universal drain
- Limited lifetime warranty

*Each Serenity 42 bath is handcrafted out of copper. Please note that the hammered copper with a weathered finish will vary from model to model and may gradually change with time due to copper's unique character.*

## AQUATIC ADVANTAGE

- National distribution
- 5 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock	Premium
Almond	Black
Bone	Cashmere
Linen/Biscuit	Mexican Sand
Sterling Silver	Red
White	Sandbar

## AVAILABLE SYSTEMS

### AIR BATH

- Variable speed blower with 20-minute timer
- Air heating system
- Electronic controls with wave and pulse features
- Air channels lined with antimicrobial coating
- Automatic purge and dry cycle with water sensors





# SERENITY 42

65 x 32 1/4 x 31 1/2 (1650 x 820 x 800)  
inches (mm)



Note: Because the Serenity 42 is a one-of-a-kind handmade bath, dimensions may vary up to several inches. Please take all measurements directly from the bath.

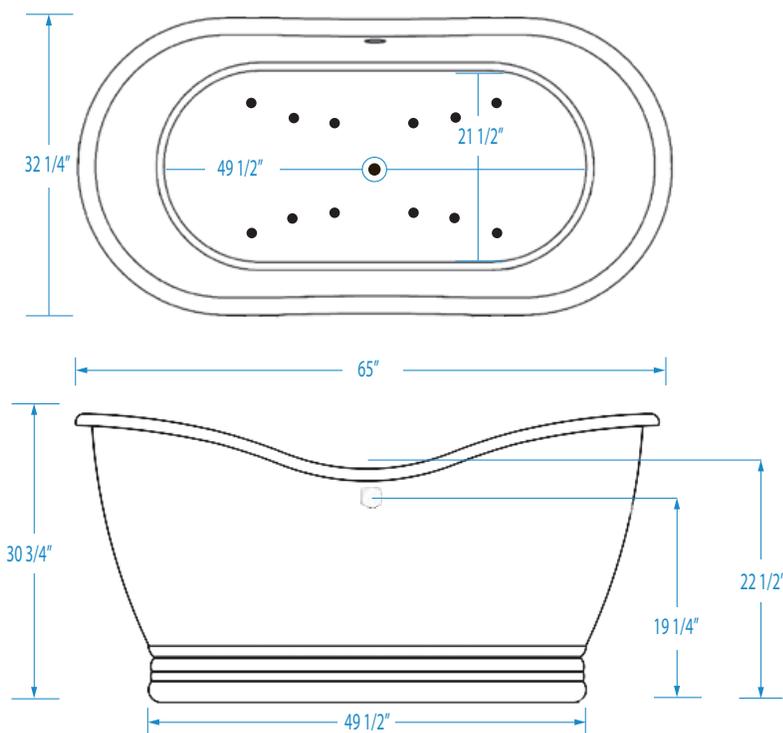

**FEATURES** lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	System	Powered By	Heater	Controls	Drain	Pkg. Wt.
Soaker #AI42COPNIKTO	Copper Nickel Interior	-	-	-	Electronic	Universal	421 (191)
Air Bath #AI42AIRCOPNIK	Copper Nickel Interior	Channel	Variable speed blower	Inline	Electronic	Universal	451 (205)

## DIMENSIONS inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
65 (1650)	32 1/4 (820)	30 3/4 (780)	-

## SUMP DATA inches (mm)

Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)
106 (401)	-

## PLUMBING DIMENSIONS inches (mm)

A	B
1 1/2 (40)	14 1/2 (368)

## ELECTRICAL DATA

Component	Specification	Requirement
Blower/Heater (Air Bath)	10.5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI

**NOTES:**

1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).

Each Serenity air bath is equipped with an air heating system to raise the temperature of the air entering the bath. This air temperature will be lower than the bathing temperature of the water, but will help reduce rapid decrease in water temperature. In addition, the air coming from the air jets will feel cool against the skin. This system does not heat the water.