

# VELENCIA 1.5 – BUILDERS' CHOICE

inches (mm)

65 ¾ x 43 ⅞ x 19 ½ (1670 x 1100 x 495) • Fax on Demand #5096

SOAKER MODEL #8666620

WHIRLPOOL MODEL #8666621



## FEATURES

- 8 hydrotherapy jets
- .75 hp pump
- Advanced safety suction system
- Bath-side on/off button
- Slip-resistant floor
- Center drain
- Lucite cast acrylic surface
- Limited 10-year warranty

## OPTIONS

- Comfort pillow:  
Biscuit, Black, White
- 1.5kW inline maintenance heater
- Grab bar(s): Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel, Color matched (Biscuit, White, Clear)
- Lift & turn waste & overflow:  
Chrome, Oil Rubbed Bronze, Polished Brass, Brushed Nickel
- Cut skirt (19")

## AQUATIC ADVANTAGE

- National distribution
- 6 manufacturing facilities
- Private fleet
- Centralized customer service
- Field support
- 24-hour fax-on-demand

## COLOR & TRIM OPTIONS

Stock



Almond (C)  
Bone (C)  
Linen/Biscuit (C)  
Sterling Silver (C)  
White (C)

C = Color Matched Trim



# VELENCIA 1.5

65 3/4 x 43 3/8 x 19 1/2 (1670 x 1100 x 495)  
inches (mm)

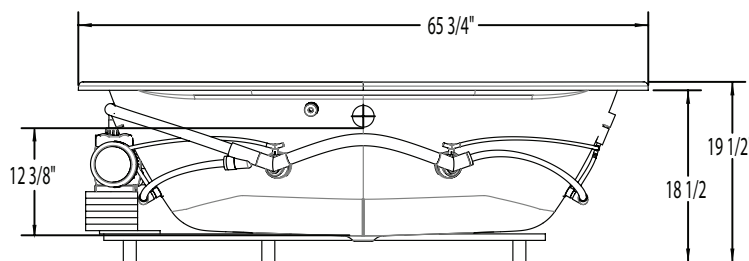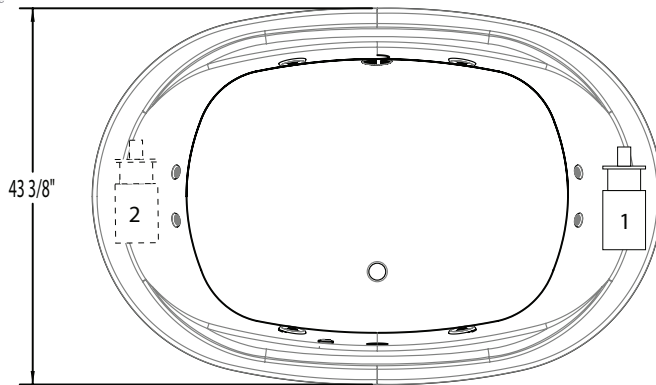

**FEATURES** lbs (kg) Dimensional Tolerance ± 3/8". Dimensions needed for site preparation should be measured from the unit. Aquatic assumes no responsibility for preparatory work.

Type and Model #	Material	Jets	Pump	Heater	Controls	Drain	Pkg. Wt.
Soaker #8666620	Acrylic	0	-	-	-	Center	79 (36)
Whirlpool #8666621	Acrylic	8	0.75 HP	1.5kW inline (optional)	Pneumatic	Center	129 (59)

**DIMENSIONS** inches (mm)

Width Overall / Net	Depth Overall / Net	Height Overall / Net	Skirt Height
65 3/4 (1670)	43 3/8 (1100)	19 1/2 (495)	-

**SUMP DATA** inches (mm)


Capacity to Overflow gal (ltr)	Min. Operating Capacity gal (ltr)	WIDTH @ centerline		DEPTH @ centerline	
		Top	Bottom	Top	Bottom
69 (261)	46 (174)	58 3/4 (1490)	44 (1120)	34 3/4 (885)	31 7/8 (810)

**PLUMBING DIMENSIONS** inches (mm)

A	Drain to Overflow	Drain Diameter / Clearance
3 1/2 (90)	12 3/8 (315)	2 (50) / 1 1/4 (30)

**ELECTRICAL DATA**

Component	Specification	Requirement
Pump	.75 HP; 5 AMP; 120 V	15 AMP; 120V, separate circuit; Class A GFCI



**NOTES:**  
1) Where applicable, utilize cut-out templates packed with unit for deck cutouts.

2) 16 x 20 (405 x 510) minimum access required at pump/blower location(s).