




## SHOWERHEAD

- H<sub>2</sub>Okinetic Technology<sup>®</sup> Showerhead
- 3-Spray Setting Showerhead
- Touch-Clean<sup>®</sup> Nozzles



## Specific Features:

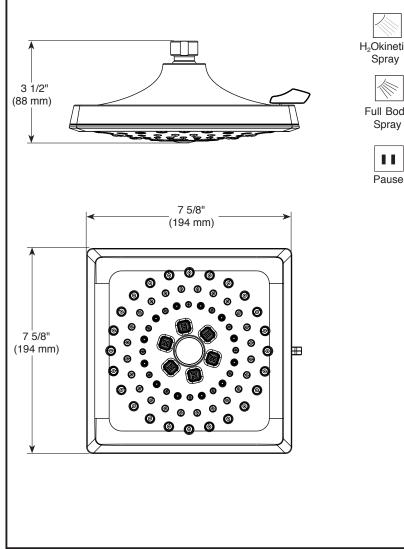

▲ Designate proper finish suffix




## **STANDARD SPECIFICATIONS:**

- ABS showerhead with three settings not a positive shut-off.
- Standard 1/2" pipe fitting.
- Easy-turn spray dial.
- Metal ball connector for durability. Easy installation.
- Maximum flow rate 2.0 gpm (7.6L/min) @ 80 PSI.

## WARRANTY

• Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.





FAUCET COMPANY

350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1

55 E. 111th Street, Indianapolis, Indiana 46280

© 2013 Masco Corporation of Indiana

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-52684 Rev. A