


Submitted Model No.:

Specific Features:



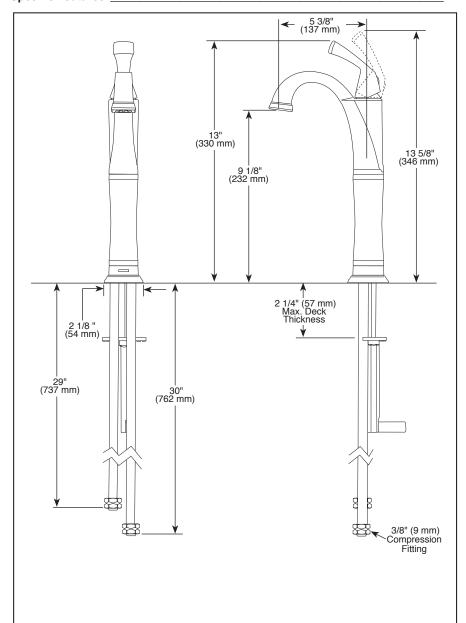

AVATORY FAUCETS

- Dryden[™] Collection
 Diamond Seal[®] Technology
- Single Handle Deck Mount
- 1 Hole Mount
- 5" Riser
- Touch₂O._{xt}TM Technology

STANDARD SPECIFICATIONS:

- Single handle lavatory riser faucet.
- 1 hole mount.
- Solid brass body.
- 5 3/8" (137 mm) long spout.
- 1 1/4" minimum 1 3/4" maximum hole size.
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- Control handle shall return to neutral position when valve is turned off.
- 3/8" O.D. straight, staggered pex supply tubes 29" (737 mm) and 30" (762 mm) long.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Models include finished 5" riser.
- Delta Touch₂O._{xt}™ Technology offers both touch and proximity sensing technology to control water flow.
- Blue light flashes for proximity activation and solid blue for touch activation.
- On-off indicator light signals red when batteries are low.
- Uses 4 AA batteries (included).

WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.





COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2013 Masco Corporation of Indiana