




# WATER EFFICIENT SHOWERHEADS

- EPA WaterSense®
- 2.0 GPM @ 80 PSI
- H<sub>2</sub>Okinetic Technology®

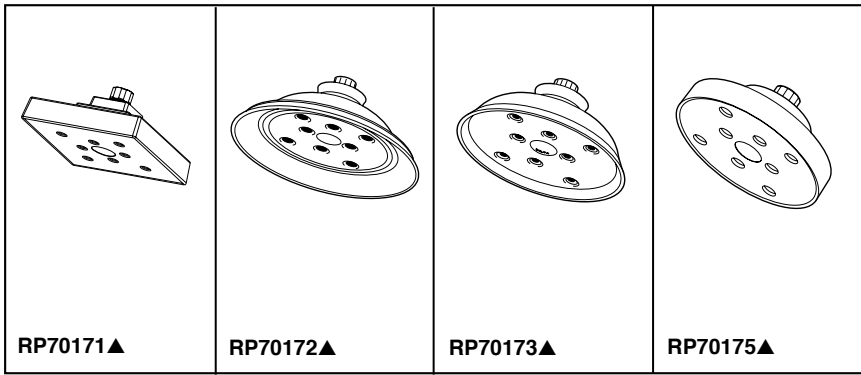

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

<p><b>RP70171▲</b></p>
<p><b>RP70172▲</b></p>
<p><b>RP70173▲</b></p>
<p><b>RP70175▲</b></p>

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-B-RP70172 Rev. B

## STANDARD SPECIFICATIONS

- Full spray function.
- 2.0 GPM, 7.6 L/Min. @ 80 PSI (552 kPa).
- H<sub>2</sub>Okinetic Technology®.
- Actual flow rate @ 45 PSI 1.82 GPM. For use with automatic compensating valves rated at 6.90 L/Min. (1.82 GPM) or less.

## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

## Spray Patterns




Full Spray



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

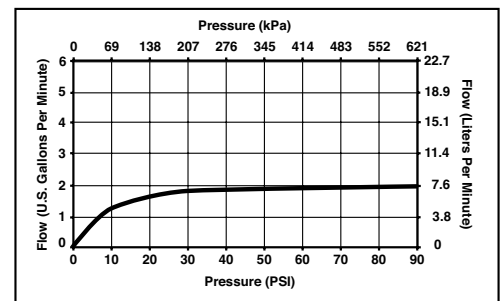

55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, ON N5P 4L1  
 © 2012 Masco Corporation of Indiana