

comfort™ seats

EZ CLOSE™ & QuickClean™

Comfort™ Seats makes it easier to clean your toilet seat!




- Patented Comfort™ Seats EZ Close™ damper system
- **Easy to Clean** - Lift off QuickClean™ design hinge covers and pull seat forward to remove
- Strong & durable - injection molded of high-impact, chemically resistant polypropylene
- Comfortable, ergonomically designed ring
- Extra thick, contoured ring provides greater support
- Durable, rust-free installation hardware
- Molded-in bumpers for added safety and comfort
- Rubber hinge pads keep seat secure and stable
- Easy, self-aligning, top mount installation with just a screwdriver




SEAT COLOR	HINGE COLOR	ROUND	ELONGATED
WHITE	WHITE	C3B3RSL-00	C3B3ESL-00

Please consult your pricing schedule for details on pricing information.

Easy Installation

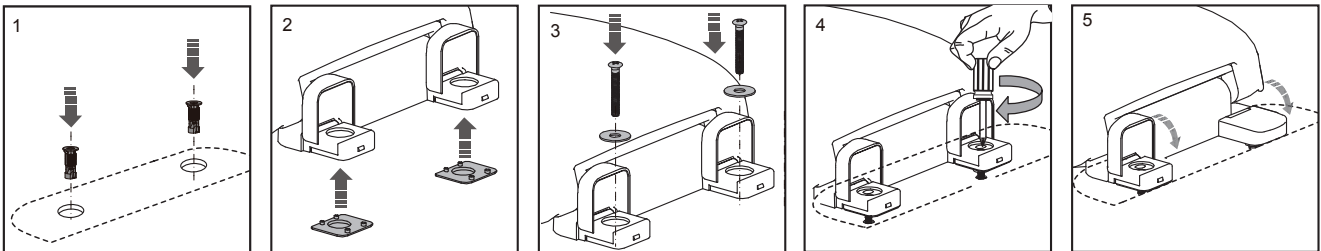

Lift and Pull Cleaning Instructions

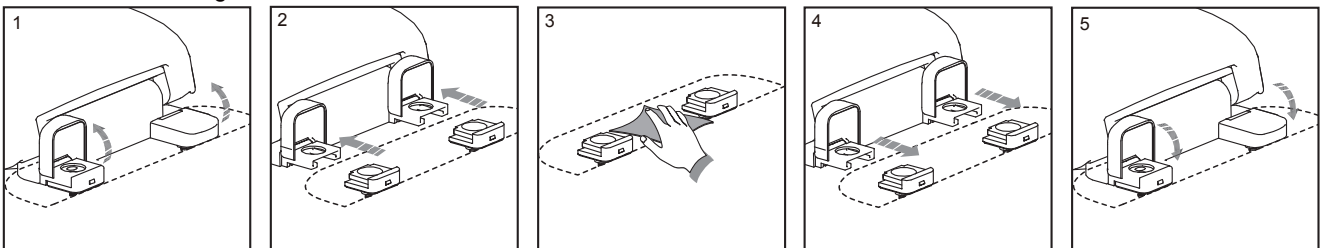

00844-01

Seat shall be Comfort™ Seats

Model Number C3B3RSL-00 Round CFWC C3B3ESL-00 Elongated CFWC


EZ Close™ & QuickClean™ Premium Plastic Toilet Seat

Category

RESIDENTIAL

Features

- Patented Comfort™ Seats EZ Close™ damper system
- Easy to Clean - Lift off QuickClean™ design hinge covers and pull seat forward to remove
- Strong & durable - injection molded of high-impact, chemically resistant polypropylene
- Comfortable, ergonomically designed ring
- Extra thick, contoured ring provides greater support
- Durable, rust-free installation hardware
- Molded-in bumpers for added safety and comfort
- Rubber hinge pads keep seat secure and stable
- Easy, self-aligning, top mount installation with just a screwdriver

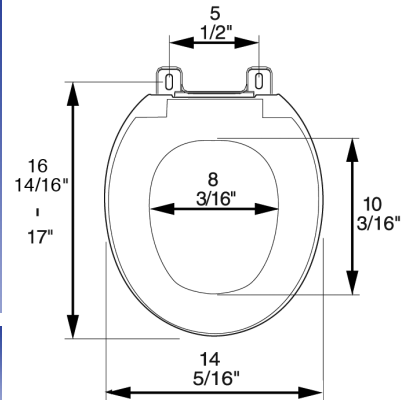

Seat Color/Finish

Specify white

Hinge Color/Finish

Specify white

Product Specifications


Hinge Design: Heavy duty EZ Close™ damper system

Ring Thickness: 5/8"

Ring Thickness with Bumper: 7/8"

Height of Seat with Cover: 1 3/4"


Size: ANSI Standard Toilet - Meets Z124.5 Section 5.1.2

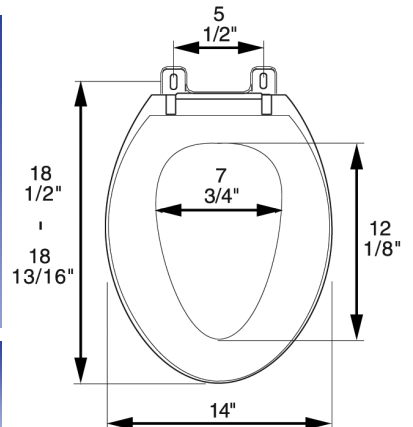

Additional Information

All seats feature UV protection.

Easy Installation

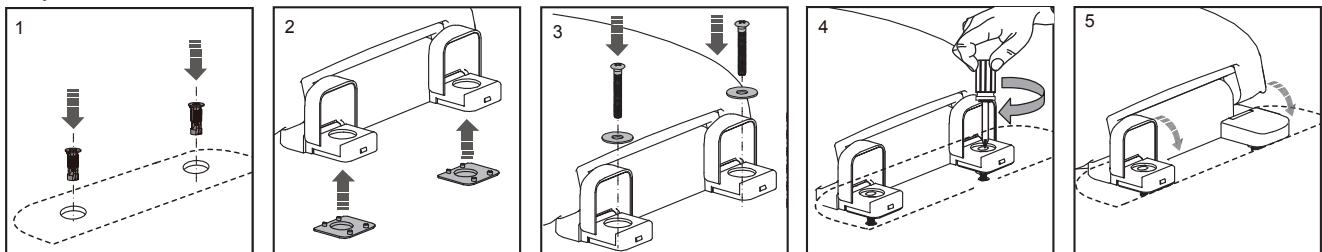

Lift and Pull Cleaning Instructions

