

## Bathtub and Whirlpool Features \_\_\_\_\_

- 72" x 36" x 22-1/2" rectangular bathtub
- Sculpted armrests and lumbar backrest
- One pillow
- Drop-in or undermount installation
- Two decorative handles
- Mansfield<sup>®</sup> Limited Ten Year Warranty
- Available in standard colors (white, almond, biscuit and bone) and premium colors (British khaki, sterling silver, black and ice gray)

### **Basic Whirlpool Features**

- Hydro-V back jet system
- Single speed pump
- 1-button electronic keypad
- Color match trim
- Dual air controls

## **Luxury Whirlpool Features**

- Hydro-V back jet system
- Variable speed pump
- 5-button electronic keypad with digital temperature readout
- Metal trim upgrades
- Chromotherapy system
- In-line heater

# Options \_

### Lift and Turn Drain

Model #	Description		Model #	Description	
SW1319	Standard Colors		PF1320	Polished Chrome	
SW1320	Polished Chrome		PF1321	Everbrass (PVD)	
SW1321	Everbrass (PVD)	-	PF1322	Brushed Nickel	
SW1322	Brushed Nickel		PF1323	Oil Rubbed Bronze	
SW1323	Oil Rubbed Bronze	۲	SWA100	Rainbow Pillow	

## Whirlpool Options \_\_\_\_\_

Model #	Description		Model #	Description	
SW1335	Chrome				
SW1336	Everbrass (PVD)	000	SWP151	In-line water heater	A Difference and a second seco
SW1337	Brushed Nickel	10 S	5009151	III-IIIIe water neater	2 3 MM - 8
SW1338	Oil Rubbed Bronze				



#### MADE IN USA

Model 5074LUX




### **Specifications**

Model #	Description	Codes/Standards
5574	72" X 36" X 22-1/2" Rectangular bathtub	
5074BAS	72" X 36" X 22-1/2" Basic Whirlpool Package	
5074LUX	72" X 36" X 22-1/2" Luxury Whirlpool Package	∽ ∞ ∽ ∞ Intertek

Specification	Description	Specification	Description
Material	Acrylic, fiberglass reinforced	Number of Jets	14
Construction	Self-contained, pre-plumbed whirlpool bath, mounted on a pre-leveled base	Water Capacity	65 gal. (min.) / 80 gal. (max.)
Pump Motor	Basic: 1.5 HP Single speed induction pump Luxury: 1.5 HP Variable speed induction pump	Floor Loading Weight	47 lbs. / sq. ft. (229 kg/m <sup>2</sup> )
Electrical Requirements	Basic: One 120V, 20 Amp, GFCI dedicated circuit. Optional heater: separate 120V, 20 Amp, GFCI dedicated circuit. Luxury: Two separate 120V, 20 Amp, GFCI dedicated circuits.	Shipping Weight	whirlpool - 170 lbs. bathtub - 160 lbs.
On/Off Control	Basic: 1-button electronic control pad Luxury: 5-button electronic control pad with digital readout showing temperature of water, speed of pump and time remaining in 20-minute cycle.	Warranty	Limited Ten Year

### Technical Information \_

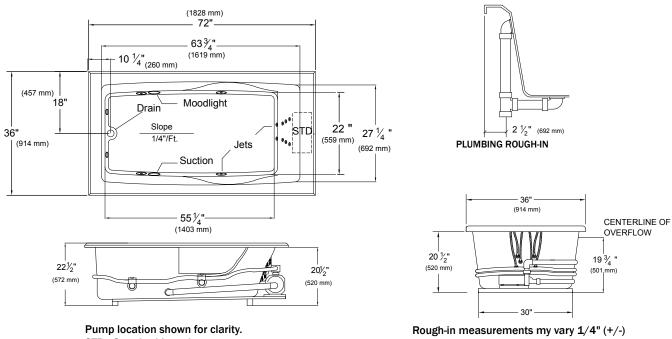

No apron available on this model.



### MADE IN USA

STD - Standard Location

These dimensions are nominal and subject to change without notice.

When tested for compliance to the requirements of ASME A112.19.7M for "Whirlpool Bath Appliances" and ANSI Z124.1.2M "American National Standard for Plastic Bathtub and Shower Units", the tested units are found to comply and are acceptable for listing under IAPMO R & T.

Certified for permanent electrical connection only.

Mansfield Plumbing Products LLC • Customer Service Toll Free 877-850-3060 • Fax 419-938-6234 Website: www.mansfieldplumbing.com • Email: custserv@mansfieldplumbing.com