

382-386 Summit™ EL

Elongated Front, Vitreous China, Two-Piece Toilet



Features

- 1.6 Gpf / 6.0 Lpf
- 3 bolt tank-to-bowl connection
- Elongated front bowl
- High performance MagnaFlush™ flushing technology
- 3" flush valve
- Pilot operated anti-siphon fill valve
- 12" rough-in
- Front-mount, chrome-plated, metal trip lever
- Wide 2-1/8" glazed trapway
- The Mansfield® limited lifetime warranty
- Available in white and standard colors: biscuit and bone



Model 382-386
Toilet seat not included



*Also available as a complete toilet package.

Components

Model #	Description	Codes/Standards
382-386	Elongated front, two-piece toilet. Less toilet seat and supply. Specify color.	
382	Elongated front, toilet bowl only. Less toilet seat. Specify color.	
386	Tank and cover only with left hand, front-mount, chrome-plated, metal trip lever. Less supply. Specify color.	
386RH	Same as above, with right hand trip lever.	
*382CTK	Elongated front, complete toilet kit. Includes toilet tank and bowl, seat, flange bolts, wax ring with polyethylene flange and instructions.	
SB400	Elongated, SmartClose™ toilet seat. Specify color.	



MADE IN USA


382-386

Summit™ EL

Elongated Front, Vitreous China, Two-Piece Toilet




Specifications

Model #	Description	Codes/Standards
382-386	Elongated front, (1.6 Gpf / 6.0 Lpf) two-piece, toilet.	

Specification	Description	Specification	Description
Material	Vitreous china	Trap Diameter	2-1/8"
Water Pressure Range	20 to 80 PSI	Trap Seal	2-1/2"
MaP Rating	1000 grams	Rough-in	12"
Water Usage	1.6 Gpf / 6.0 Lpf	Shipping Weight	Model 382 - 50 lbs.; Model 386 - 34 lbs.; Model 382CTK - 93 lbs.
Water Surface Area	10" X 8"		
Flush System	3" flush valve MagnaFlush™ flushing technology	Warranty	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

Technical Information

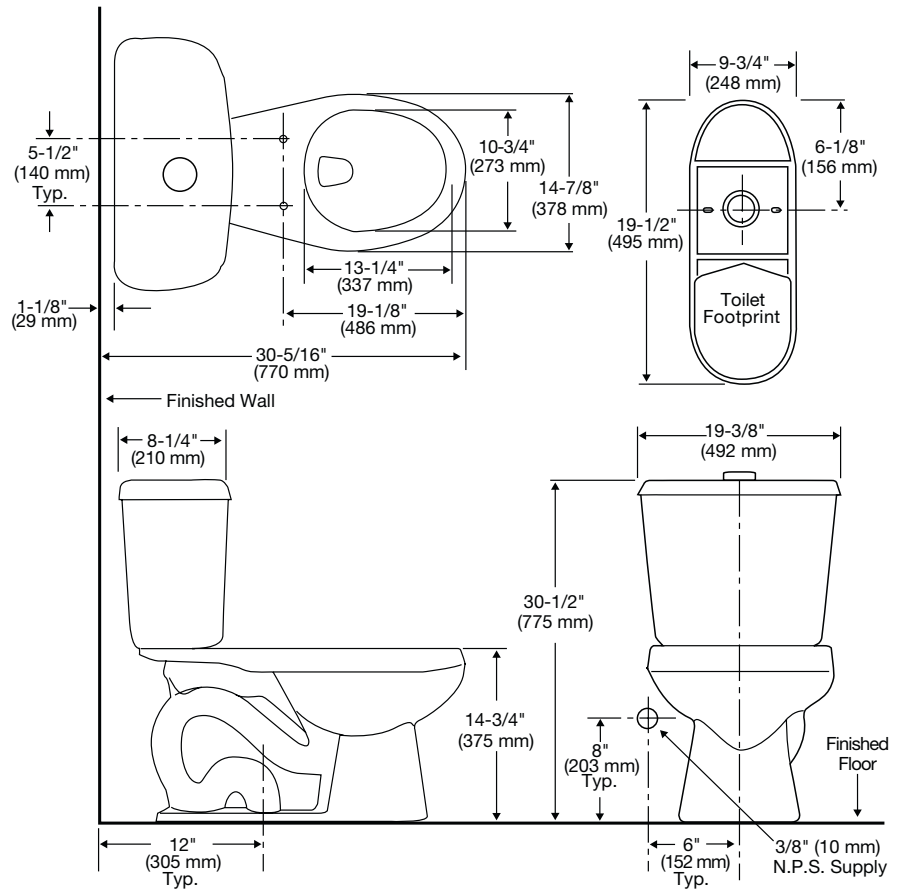

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

These dimensions are nominal and subject to change without notice.

Fixture performance and specifications meet or exceed ASME A112.19.2-2008/CSA B45.1-08 standards, and other state and local codes.



MADE IN USA