

### ► Code Number

3070228

### ► Description

Exposed, Water Closet Flushometer for floor mounted or wall hung top spud bowls.

### ► Flush Cycle

1.6 gpf/6.0Lpf

### ► Specifications

Quiet, Exposed, Piston Type, Chrome Plated Closet Flushometer with the following features:

- Fixed Volume Piston with Filtered O-ring Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Vacuum Breaker Flush Connection
- Spud Coupling, Wall and Spud Flanges for 1½" Top Spud
- Cast Set Wall Flange with Set Screw
- Sweat Solder Adaptor with cover tube
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Adjustable Tailpiece
- High Copper, Low Zinc Brass Castings for Dezincification Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### ► Variations


YG Extended Bumper on Angle Stop (for seat with cover)

### ► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

### ► Fixtures

Consult factory for matching Sloan brand fixture options.

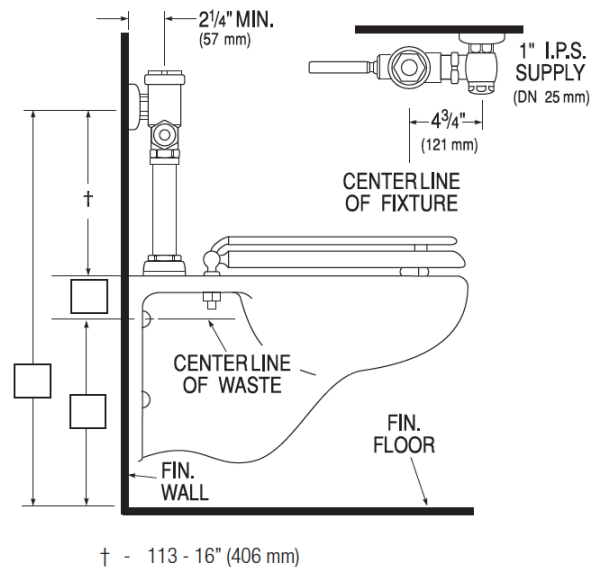

### ► Compliance & Certifications



This space for Architect/Engineer Approval