


25-500-B30-V

Temptrol II™ (2000 Series) Pressure Balancing mixing valve with built-in choke and adjustable stop screw to limit handle turn. Lever diverter. Clear-Flo shower head with arm and flange. Wall/hand shower with in-line vacuum breaker, flexible 5' metal hose, wall connection and flange. 30" slide bar for hand shower mounting.

Suffix X: Integral service stops—allows water shut-off at valve for service

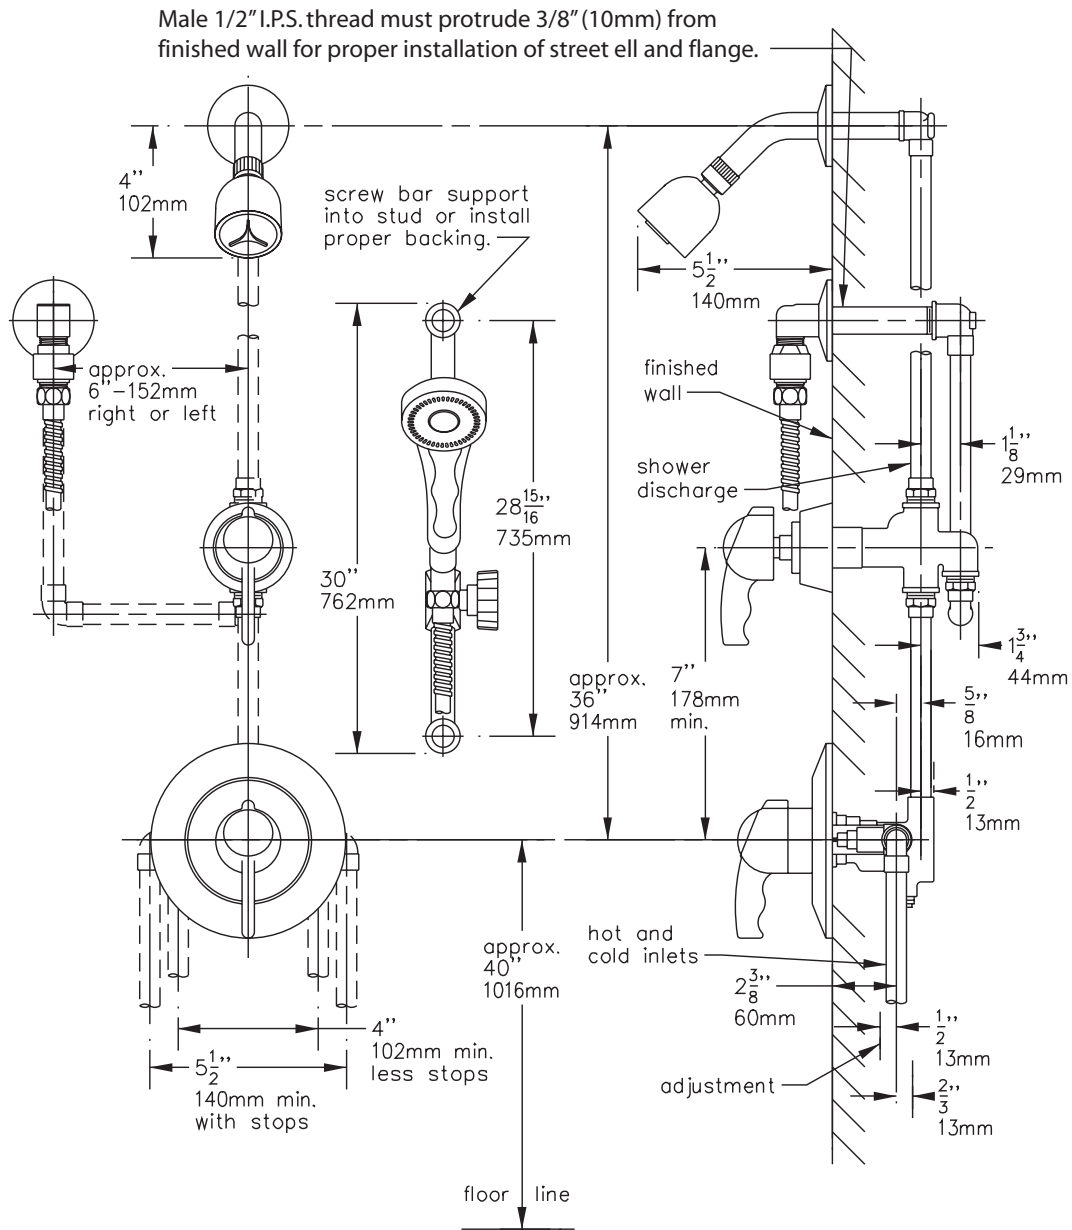

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. **Dimensions are for ADA compliance (Americans with Disabilities Act)** consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2003, 2008 Symmons Industries, Inc. Printed in U.S.A. ■ 050708

SYMMONS[®]
 the smart choice™