

Shower System with hand shower 4205 **Specification Submittal**

Feature Highlights

- Symmons shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Separate dual outlet lever diverter valve
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Shower head with mounting bracket
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Metal construction with polished chrome finish


Model Numbers

- □ 4205Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY and dual outlet diverter p/n 4-458E-BODY 4205-TRMTrim only, valve and diverter must
- be ordered separately
- 4000-BODY......Symmons Temptrol® pressure balancing mixing valve without
- ☐ 4000-X-BODY.... Symmons Temptrol[®] pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shutoff for service.
- ☐ 4-458E-BODY.... Symmons dual outlet diverter valve without trim

Finish Options

Append appropriate -suffix to model number.

- ☐ STN Satin nickel finish
- ☐ ORB Oil rubbed bronze finish

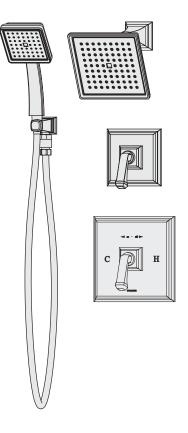

Options / Modifications

Append appropriate -suffix to model number.

- □ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4205.)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime to the original end purchaser in consumer installations.
- 5 years for commercial installations

