
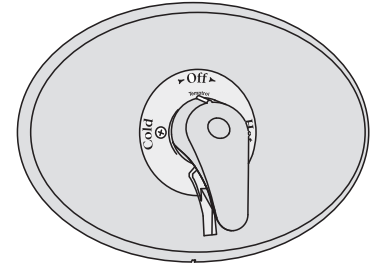


Location:

# SYMMONS® Deluxe Temptrol™ Shower System, DS-96-1-LR-OP Specification Submittal



## Feature Highlights

- Symmons shower system with lever handle.
- Temptrol® pressure balancing mixing valve with integral diverter and adjustable stop screw to limit handle turn.
- Clear-flo single mode Showerhead, 4-228
- Showerhead mounting arm and flange
- Standard flow rate 2.5 gpm (9.5 L/min)
- Polished chrome finish (standard)

## Model Numbers

- DS-96-1-LR-OP... Symmons Shower System with Temptrol® pressure balancing mixing valve,

## Finish Options / Modifications

*Append appropriate -suffix to model number.*

- STN Satin nickel
  - Polished chrome (standard finish)

## Options / Modifications

*Append appropriate -suffix to model number.*

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Symmons Temptrol® pressure balancing mixing valve also includes integral service stops to allow water shut-off for service,
- L/HD Showerhead is not included. Includes mounting arm and flange only.
- 2.0 2.0 (7.6 L/min) Flow rate restrictor
- 1.5 1.5 (5.7 L/min) Flow rate restrictor


## Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

## Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

## Dimensions *Deluxe Temptrol Shower System, DS-96-1-LR-OP*

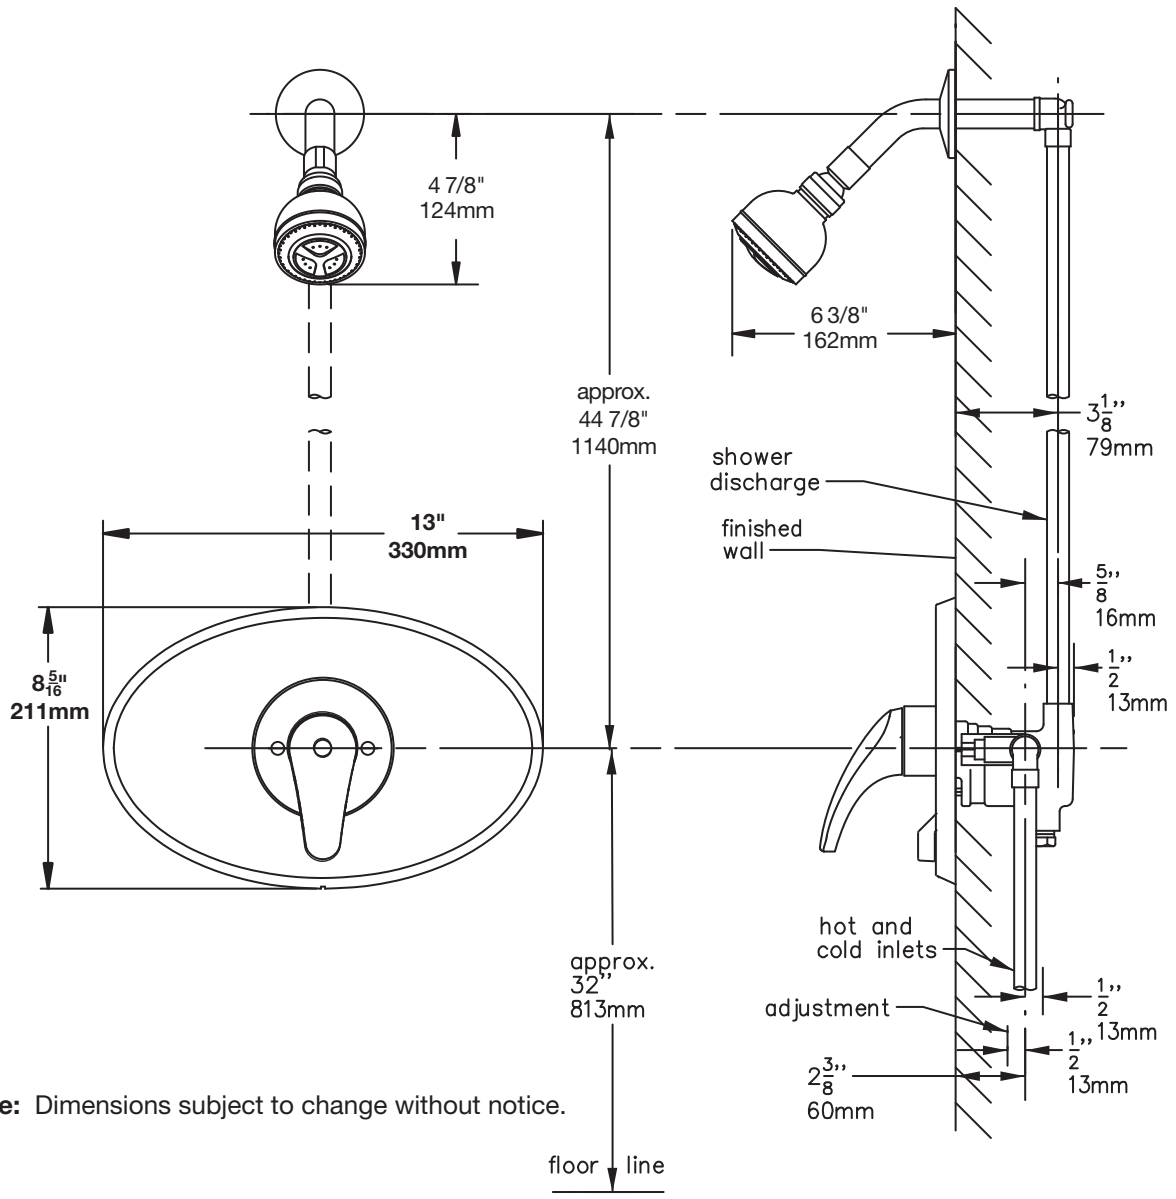

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300  
 Website: [www.symmons.com](http://www.symmons.com) ■ Email: [customerservice@symmons.com](mailto:customerservice@symmons.com)

©2009 Symmons Industries, Inc. Printed in U.S.A. ■ 073009

**SYMMONS**<sup>®</sup>  
 the smart choice™