TOTO_®

MS934304SF

Lloyd[®] One-Piece Toilet, 1.6GPF

FEATURES

- G-Max[®] flushing system, (1.6GPF/6.0LPF)
- Universal Height
- Decorative one-piece with skirted design and high-• profile tank
- Elongated front bowl with SoftClose[®] maple seat ٠ (SS304) Seat and lid gently close with the touch of a hand
- Chrome trip lever
- 12" Unifit rough-in (included), less supply

MODELS

- MS934304SF ٠ SS304 SoftClose seat included
- TSU03W.10 10" Unifit rough-in (sold separately)
- TSU03W.14 14" Unifit rough-in (sold separately)

COLORS/FINISHES

Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige #51 Ebony

PRODUCT SPECIFICATION

The one-piece low consumption G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be at Universal Height. Toilet shall be of skirted design with high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be TOTO Model MS934304SF_



(МАХ

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)



Lloyd® One-Piece Toilet, 1.6GPF


SPECIFICATIONS


- 1.6 GPF/6.0LPF Water Use •
- Flush System G-Max
- Min. Water Pressure 8 psi (static)
- 10-3/4" x 8-1/4" Water Surface 2-1/8"
- Trap Diameter •
- Rough-in 12", 10" and 14" optional
- Trap Seal 2-1/4"
- Warranty One Year Limited Warranty ٠
- Material Vitreous china •
- Shipping Weight 120 lbs.
- Shipping Dimensions 32" L X 20"W X 17-3/4" H1 X 28-3/4" H²

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

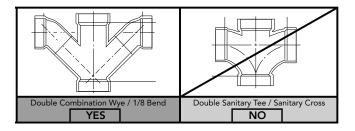

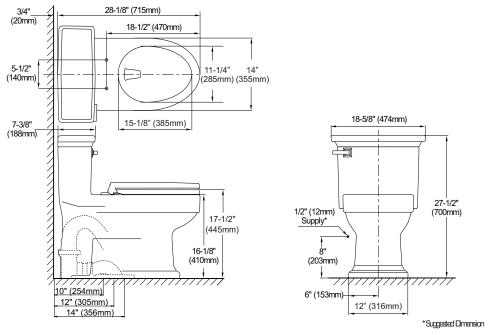

TOTO

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com