American Standard

# Style That Works Better


# 

TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET WITH GOOSENECK SPOUT

WITH GOOSENECK SPOUL



### 6531.170 Shown

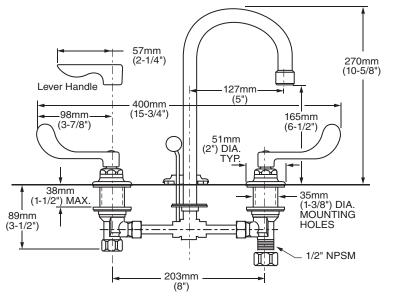

# **GENERAL DESCRIPTION:**

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. All brass drain bodies with 1 1/4" (32mm) tailpieces (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate. Vandal-Resistant and Laminar Flow aerators are available.

# SUGGESTED SPECIFICATION:

# ICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 653\_.\_\_\_.002.

## **MODEL NUMBER:\***

#### 6530.170 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.

#### **6531.170 Widespread Lavatory**

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Pop-up drain.

# □ 6532.170 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.

### **6530.140 Widespread Lavatory**

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Less drain and pop-up hole.

#### **6531.140 Widespread Lavatory**

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Pop-up drain.

#### G532.140 Widespread Lavatory

1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Grid strainer drain.

# **PRODUCT FEATURES:**

**Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range.

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.



Style That Works Better


# **MONTERREY**<sup>™</sup> **TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET**

WITH GOOSENECK SPOUT

# **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ASME A112.18.1 **CSA B 125** NSF 61/Section 9 and Annex G



		Finish
Product		Polished Chrome
Number	Description	002
6530.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
6531.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Pop-up drain.	
6532.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
6530.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
6531.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Pop-up drain.	
6532.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

### Other Aerators Available:

(<sup>L</sup>

Part Suffix	Description
LV22	2.2 gpm (8.3 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet
V22	2.2 gpm (8.3 Lpm) Vandal-Resistant Aerator
A15LV	Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator
V05	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Non-Aerated Spray
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Non-Aerated Spray

\*PCA - Pressure Compensating

\*\*Meets Cal Green Code

© 2012 AS America Inc.