MOEN

Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

Metal construction with varoius finishes idenditfied by suffix
 OPERATION

- Lever style handle with temperature indicator on the escutcheon, pull-on/push-off operation
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm \ 2^\circ$

FLOW

Showerhead limited to 2.5 gpm (9.5 L/min)
CARTRIDGE


- 1225[®] cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to ASME A112.18.1M/CSA B-125, and all applicable requirements referenced therein
- ADA (for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



WYNFORD[™] MOENTROL[®] Single-Handle Tub/Shower Trim Only

Models: T5501 series - valve only trim T5502 series - shower only trim T5503 series - tub/shower trim

Valves: 3510, 3520, 3570 Series

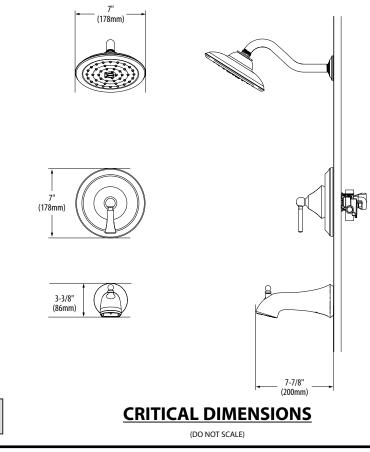



PC14481

M/27/2015 Released 0 Rev. 3/15