


Model: 45321



A Moen Incorporated Brand



UPC®

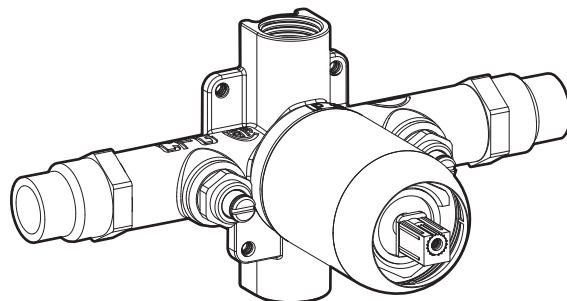

Pressure Balancing Cycling In-Wall Valve With Stops

DESCRIPTION

- Brass construction
- "Check Stop" style shut - off stops
- 1/2" connections: CPVC Inlets
- Pressure balancing 4 port cycling valve
- Twelve (12) individual boxes per master carton

OPERATION

- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3.6^{\circ}\text{F}$
- Adjustable temperature limit stop to control maximum hot water
- For use in wall thicknesses 2.5" or greater
- Extension kit available, item #40073

CARTRIDGE


- European ceramic disc technology
- Non-metallic, non-ferrous, and plastic material

STANDARDS


- Third party certified to CSA B125.1, ASME A112.18.1, CSA B-137.6, ASTM D2846 and all applicable requirements referenced therein, California Proposition 65, Illinois, Massachusetts, and Texas
- All CFG products are compliant to all plumbing codes that require 3rd party certification to the applicable plumbing/fitting standards

WARRANTY

- Ten (10) year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-5522 for complete warranty information.

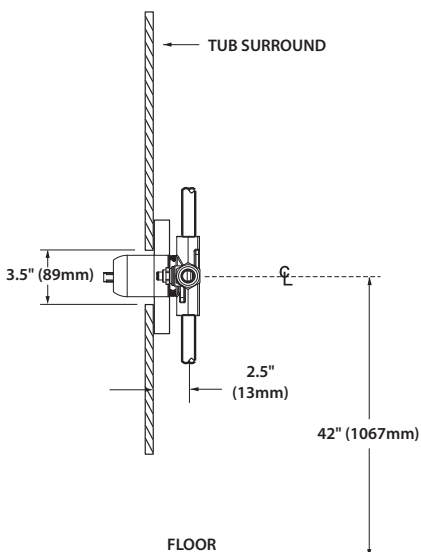

THIN WALL

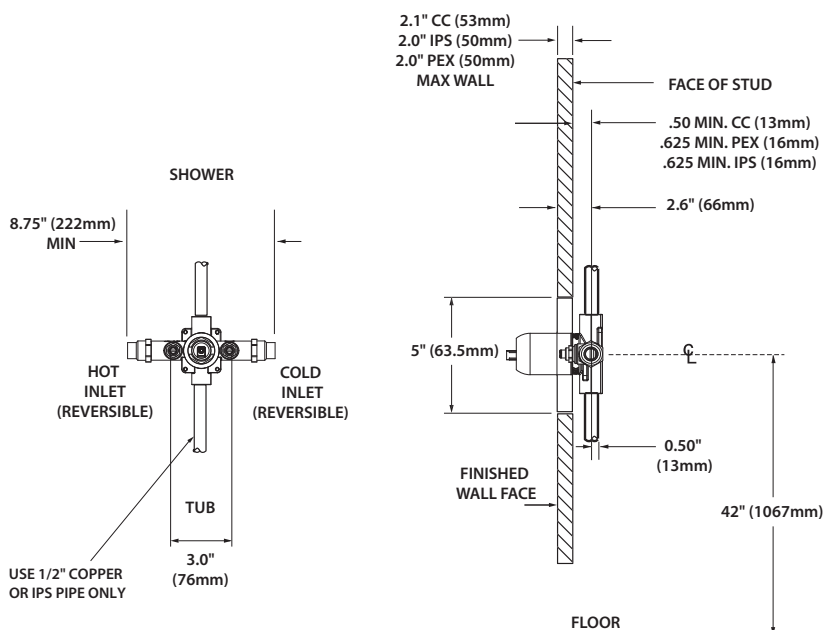

THICK WALL