




# CA42711 series (1/2 IPS) with waste CA42712 series (3/8 Compression) with waste CA42717 series (1/2 IPS) without waste











# One Handle Lavatory Metal With Waste

#### DESCRIPTION

- · Metal construction with various finishes identified by suffix
- · Includes 50/50 pop-up waste assembly where noted.
- Flexible supply lines with 1/2" IPS connections where noted or 3/8" compression fittings where noted
- · Six (6) individual boxes per master carton

## **OPERATION**

- · Pivot action, lever-style handle
- Temperature control by 90° arc of handle travel
- · Will operate with less than 5 lbs. of torque
- · No grasping motion required to operate the faucet handle
- · Features red/blue hot/cold temperature indicators

#### **FLOW**

· Aerator limited to 1.5 gpm max (5.7 L/min) at 60 psi

# CARTRIDGE

- · Ceramic disc technology
- · Non-metallic, non-ferrous, and plastic material
- · Single body construction for easy replacement

#### **STANDARDS**


- Third party certified to WaterSense® CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- · ADA for lever handle

## WARRANTY - RESIDENTIAL, COMMERCIAL

- Ten year limited warranty against defects in materials and manufacturing workmanship
- Refer to the installation instructions enclosed with each CFG product or call 1-888-450-4910 for complete warranty information

#### NOTE:

This faucet is designed to be installed through
1 hole, 1-1/8" (29mm) minimum diameter, or
3 holes, 1-1/8" (29mm) minimum diameter, 4" centers

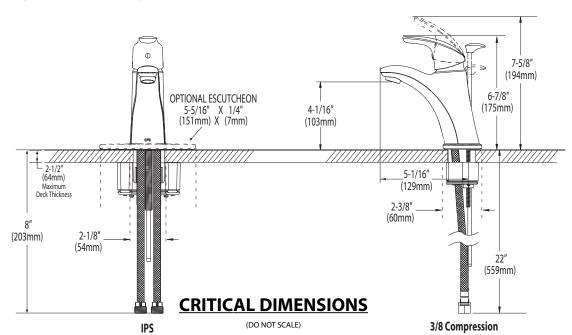

 $\texttt{CLEVELAND}\ \mathsf{FAUCET}\ \mathsf{GROUP} \cdot 25300\ \mathsf{AL}\ \mathsf{MOEN}\ \mathsf{DRIVE} \cdot \mathsf{NORTH}\ \mathsf{OLMSTED}, \mathsf{OHIO}\ 44070 \cdot (888)\ 450-5522 \cdot \mathsf{www.cfgonline.com}$