MOEN

Specifications

Buy it for looks. Buy it for life.®

DESCRIPTION

- Chrome plated metal construction
- The tub spout is chrome plated ABS material, is a diverter type and is 1/2" slip-fit design
- Includes showerhead, arm, flange and diverter tub spout. **OPERATION**
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm \ 3^\circ$

FLOW

Showerhead is limited to 2.5 gpm (9.5 L/min) Max

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- · Nonmetallic/nonferrous and stainless steel material

STANDARDS

• Third party certified to meet CSA B-125, ASME A112.18.1M, ASSE 1016, and all applicable requirements referenced therein


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU[°] POSI-TEMP[°] Single-Handle Tub/Shower Trim Kit

Model: T183 (Bulk Packed 12 per carton)

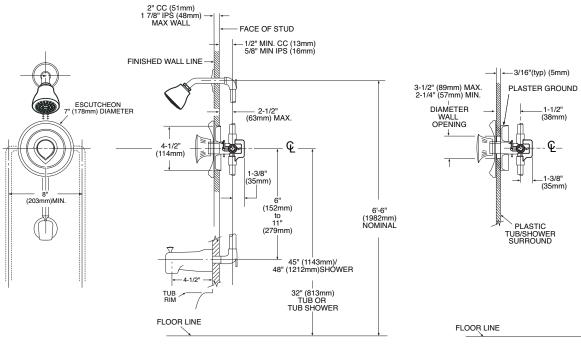

THICK WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)

THIN WALL APPLICATION