


PRESSURE DROP CURVES

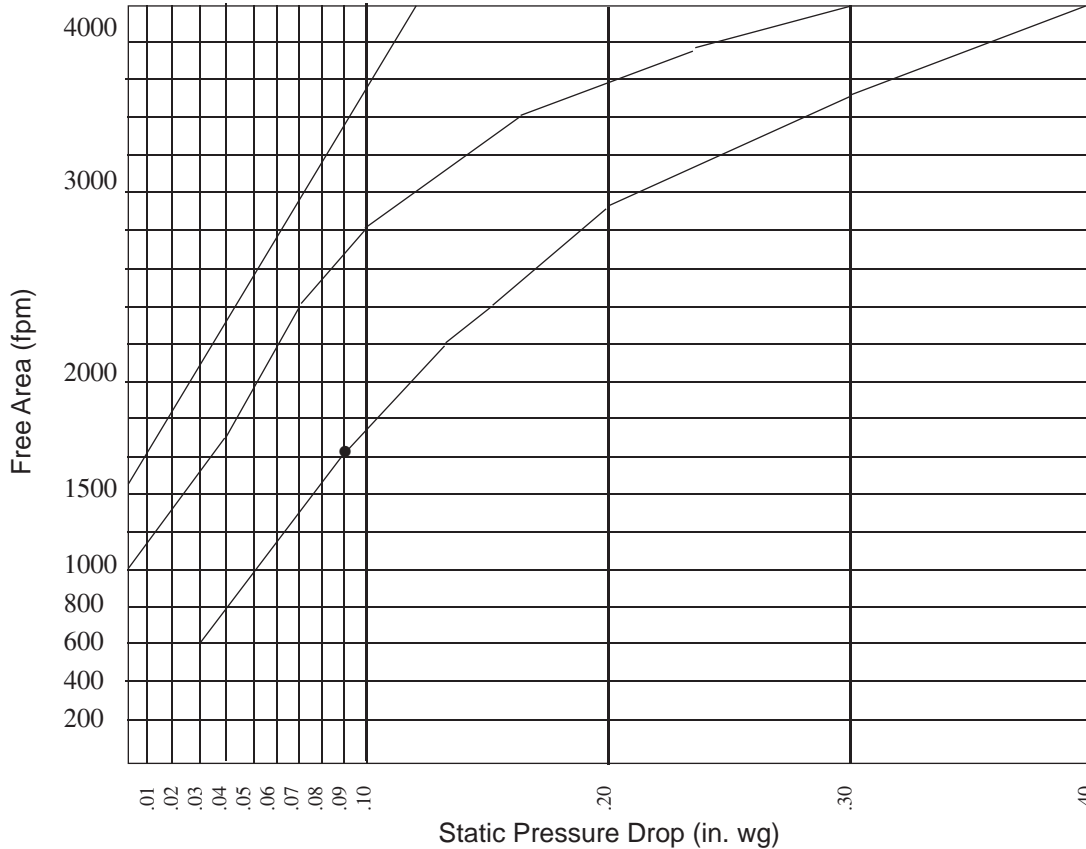

MODEL DESIGNATIONS

Curtain-type fire dampers for use in static systems

Shoemaker Model	Damper Mounting Position	Single Section		Multiple Section		Description
		W	H	W	H	
Series 2600						
2601	V	60	60	120	120	1-1/2 hour
2602	H	60	60			1-1/2 hour
4-1/4" 2633	V	60	52			1-1/2 hour, out of airstream
2634	H	60	52			1-1/2 hour, out of airstream
2649	V		52 rd.			1-1/2 hour, round
2650	H		52 rd.			1-1/2 hour, round spring actuated
2661	V	60	60			3 hour fire door
2663	V	60	52			3 hour fire door, out of airstream
2665	V		52 rd.			3 hour fire door, round
Series 2500						
2501	V	48	49			1-1/2 hour
2502	H	41	36			1-1/2 hour
2" 2533	V	48	41			1-1/2 hour, out of airstream
2534	H	41	29			1-1/2 hour, out of airstream
2549	V		40 rd.			1-1/2 hour, round
2550	H		28 rd.			1-1/2 hour, round spring actuated
2561	V	48	49			3 hour fire door
2563	V	48	41			3 hour fire door, out of airstream
2565	V		40rd.			3 hour fire door, round