

High-Efficiency Urinal EcoPower® Flushometer Valve, 1/8 gpf

FEATURES

- EcoPower® hydropower self-generating system
- Electronic flushometer valve complete with 3/4" angle stop and 3/4" vacuum breaker set
- 1/8 gpf or less
- Back spud - concealed 4" x 4" Cover plate
- 12 hour automatic flush for trap seal protection

MODELS

- TEU3UN#SS
Valve only, Surface mount, Satin finish
- TEU3UN11#SS (3/4" Vacuum breaker)
Back spud, Satin finish
Complete set supplied with:
Vacuum breaker & angle stop set - VB13RB-11
 - 3/4" Angle stop - 10077t6
 - 3/4" Vacuum breaker - 10075t6
 - Outlet tube - TH559EDV171
 - Sweat solder kit - SJ1
- Optional Part:
Z-4000-J - Adapter for ground joint angle stops



COLORS/FINISHES

- #SS Stainless Steel

CODES/STANDARDS (to be listed)

- Meets or exceeds ASSE 1037, CSA B125.3
- Certifications: IAPMO(cUPC), ASSE, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code and others
- ADA compliant

PRODUCT SPECIFICATION

TOTO® Model No. _____
Automatic Infrared sensor activated, urinal valve. 4" x 4" cover plate with brushed stainless steel finish. Low water consumption of 1/8 gallons per flush. Stainless steel self-cleaning debris screen and self-cleaning solenoid. Electrical sensor separated from valve and sealed in a waterproof compartment. manual override button incorporated. Automatic flush every twelve hours if not used. Angle stop and vacuum breaker included with accessories.



TEU3UN

High-Efficiency Urinal EcoPower® Flushometer Valve, 1/8 gpf

SPECIFICATIONS

- | | |
|-------------------------|---|
| • Warranty | Three Year Warranty |
| • Material | Bronze casting |
| • Power Supply | Hydro-Power Charge |
| • Water Supply | 3/4" NPT |
| • Detection time | Factory setting at six (6) seconds minimum |
| • Detection range | Self-adjusting to environment |
| • Discharge quantity | Preset to 1/8 gpf / 0.47 lpf |
| • Operating temperature | 32°-104°F (0°-40°C) |
| • Supply water pressure | 15 psi - 125 psi* |
| • Trap seal protection | Automatically flushes once after twelve (12) hours of non-use |

These specifications are subject to change without notice.

*Water pressures over 80 psi are not recommended for most plumbing fixtures.


Check your local plumbing code for details.

INSTALLATION NOTES


The recommended installation for the urinal flushometer valve is to have a 7" (178mm) minimum space in wall. Also a minimum 12" x 12" access panel or walk-in chase is required for service and maintenance.

DIAGRAM

Dimensions: Inch

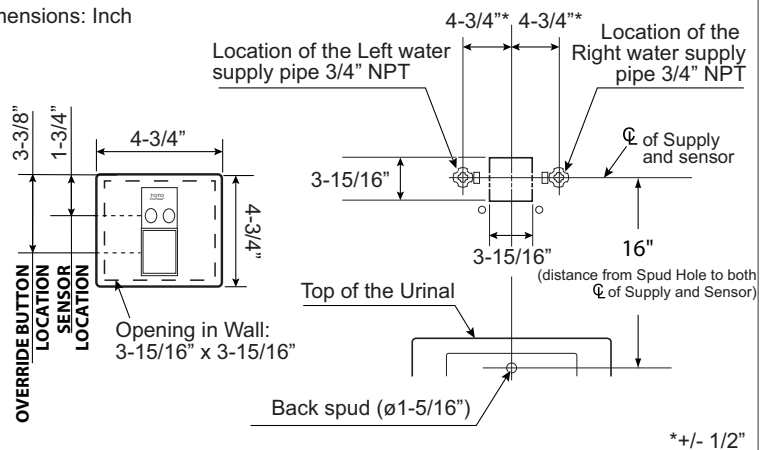

RECOMMENDED INSTALLATION

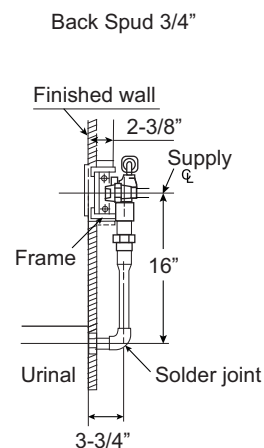

TOTO

These dimensions and specifications are subject to change without notice