


178P22CH Theft-Proof Mirror




FEATURES/TYPICAL SPECIFICATIONS

- Surface Mount Installation
 - Pre-drilled mounting holes spacing: y1 = 9.312", y2 = 18.624" center-to-center and x1 = 12.624", x2 = 6.312" center-to-center
- 20 gauge galvanized steel mirror back
- Concealed tamper-proof keyhole and retainer clip mounting system
- 1/4" thick float glass mirror
- Polished stainless steel frame (SS8)
- Mirror can be mounted vertically or horizontally
- Includes installation hardware
- Pallet quantity = 30 units

Finishes:

Housing: N/A
 Mirror: Flat Mirror
 Frame: SS8-Polished Stainless Steel

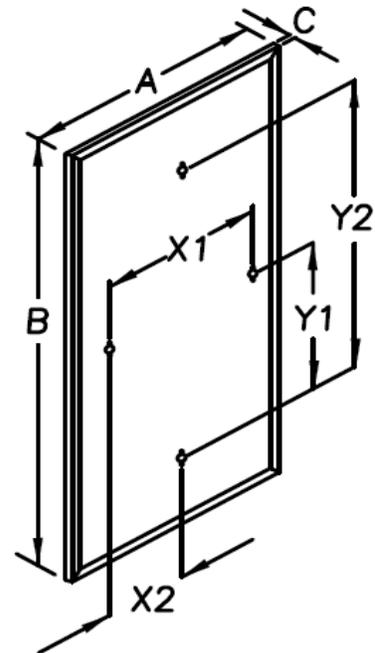

		Dimensions In Inches		
Model #	Description	A	B	C
178P22CH	THEFT PROOF 16X22 SS8	16 $\frac{1}{8}$	22 $\frac{1}{8}$	$\frac{1}{2}$

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

* All models and material specifications are subject to change or withdrawal without notice.