




Architect/Engineering Specifications:

0.40 GPM aerator with polished chrome plated brass body, 0.40 GPM flow and 13/16-27 UN male thread adapter. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

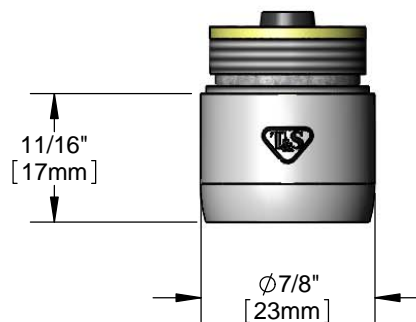

Features & Benefits:

- Aerator with polished chrome plated brass body
- 0.40 GPM flow
- 13/16-27 UN male thread adapter, Series 3
- Material: Polished chrome plated brass body

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 0.40 GPM @ 60 psi

