

SPECIFICATIONS

OPULENCE™ TRIM ONLY SINGLE HANDLE PRESSURE BALANCE TUB & SHOWER FAUCET

Flow Rate

Model

D512057T (Tub & Shower trim) D512557T (Shower only trim)

Description

- 4" Eterno showerhead
- 12" brass curved showerarm
- · Diverter on valve
- Showerhead D460025, A112.18.1M, 2.0 gpm (7.6 LPM) maximum flow rate @ 80 psi; 1.5 gpm (5.7 LPM) minimum flow rate @ 45 psi

2.5 2 1.5 1 0.5 1 20 40 60 80 PSI

IAPMO R&1



Standards



- UPC/cUPC
- Energy Policy Act of 1992

MEETS ASME A112.18.1 M • ASME A112.18.1M




- ADA Accessibility Guidelines for Buildings and Facilities -
- 4.27.4 Controls and Mechanisms


Finishes Available


- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

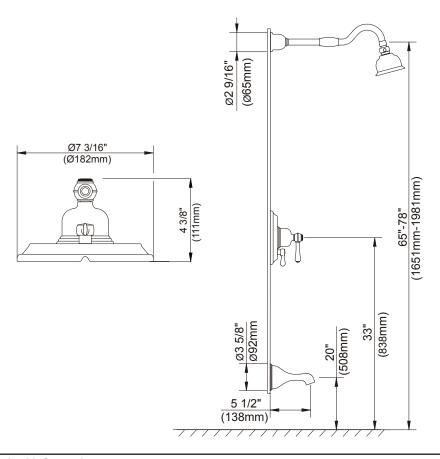





Su	hm	ittal	Info	rm	ati	on:
ou	N111	ittai		,,,,,	uu	o

Contractor: _

Job Name: _____

Location: _____