



The Woodford Model 30 faucet automatically drains with or without a hose attached. The faucet is intended for irrigation purposes and designed for residential and light commercial outside water service applications.


The Model 30CC, Close Coupled with standard C inlet, is designed for use in non-freeze areas and fits within 2" x 4" stud wall. (Optional CP or PX inlets are available but will not fit within 2" x 4" wall.)

SPECIFICATIONS:

- Faucet automatically drains with or without hose attached
- No sprayback when faucet is shut off
- All structural components made of brass
- Model 30 wall faucet is ASSE 1053 Approved.
- Attached Backflow Preventer features:
 - ASSE 1052 Listed
 - Field Testable
 - Dual Check Valves
 - Holds against 125 p.s.i backpressure
- No lead solder
- Oval metal handle (Tee Key available)
- Max pressure: 125 p.s.i.
- Max Temperature: 120° F

Patent Pending

- Optional WF-30MS Mounting Sleeve. See website for details.

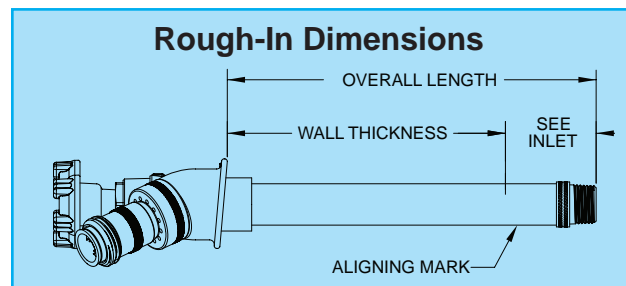

Wall Thickness (inches)	CC	4	6	8	10	12	14	16	18	20	22	24
	1.8	2.0	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8	2.9	3.0
Shipping Weight Each												

*Overall Length Dimension: Add wall thickness and inlet option length shown in chart above. Overall length for 30CC is 2 3/4".

For Installation Instructions go to www.woodfordmfg.com or call 1-800-621-6032

Backflow Protected Automatic Draining Freezeless Wall Faucet

Model 30

Model 30CC (For Non-Freeze Areas ONLY)



Inlet Descriptions

	<p>C Inlet COMBINATION Copper Sweat Fitting 1/2" K, L or M Inside 3/4" M Only Outside</p>
	<p>CP Inlet COMBINATION 1/2" Male Pipe Thread 1/2" Female Sweat</p>
	<p>CP3 Inlet COMBINATION 3/4" Male Pipe Thread 3/4" Female Sweat</p>
	<p>P Inlet COMBINATION 1/2" Female Pipe Thread 3/4" Male Pipe Thread</p>
	<p>PX Inlet 1/2" PEX Tube Fitting</p>
	<p>PX3 Inlet 3/4" PEX Tube Fitting</p>

When ordering, specify model, inlet and wall thickness.