# TOTO<sub>®</sub>

## SW2014 WASHLET® A100

### FEATURES

- Gentle Aerated, Warm Water, Dual Action Spray with oscillating feature
- Adjustable water temperature and volume
- Docking Station Easy to Install and Clean
- Convenient arm control panel
- Heated Seat with Temperature Control



## MODELS

• SW2014 - Elongated front

## COLORS/FINISHES

- Standard
- #01 Cotton

## PRODUCT SPECIFICATION

#### Seat shall be model # SW2014\_

Seat shall have gentle aerated, warm water, dual action spray with cycling movement and massage feature. Seat shall have adjustable water temperature and volume. Seat shall be solid plastic with closed front seat and cover. Seat shall include power cord, and water supply hoses.

## CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 #68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements



## WASHLET® A100

## **SPECIFICATIONS**

•	Power Rating: Power Cord:	AC 120V-60Hz, 290W Maximum length: 3.94 ft/120 cm, 3 prong	Seat Warming Feature	:Surface Temperature: Minimum: 82°F/28°C Maximum: 97°F/36°C	
		grounded plug •	Safety Device:	Thermal fuse	
•	Water Feature:	Adjustable Water • Flow Rate:	Water Supply Pressure	sure:Minimum: 7.25 psi Maximum: 108.75 psi	
		Front washing - • 9.8 -14.5 oz/min	<b>Ambient Temperature:</b> Range: 32°F/0°C to 104°F/40°C		
		Rear washing - 9.1 - 14.5 oz/min Soft Rear - from	Warranty: Shipping dimensions:	One Year Limited Warranty A100 Elongated – 23 ½" x 20 1/2" x 9"	
		9.1 - 14.5 oz/min •	Shipping weight:	A100 Elongated – 16lbs	
•	Washing Spray Temp:	Minimum: 95°F/35°C Maximum: 104°F/40°C	Note: These numbers may change once the first samples arrive		
٠	Safety Device:	Thermal fuse			

18 13/16" [478mm]


15 3/8"


[390mm]

- 51/2" [140mm]

#### INSTALLATION NOTES

- For use with potable water only. Do not use with recycled water.
- Washlet C200 may not fit certain toilet bowl designs.
- If possible, with your order, please include your model number (from the underside of the tank lid).
- It is highly recommended to use a surge protector to prevent damage in the event of a power surge.

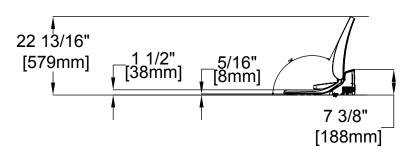

11 15/16" [303mm] 

\*The 3-prong cord on the Washlet is on the right side and is 4' long.

## 

20 7/8" [531mm]

These dimensions and specifications are subject to change without notice