

DESCRIPTION

- Metal construction with chrome plated, LifeShine® brushed nickel or LifeShine® hammered nickel finishes
- 3/4" IPS connection
- Includes four single-function body sprays
- Includes 7" rainshower showerhead, arm and flange
- Includes three function hand shower with 69" hose assembly, drop ell and wall bracket
- For use with S936 3/4" thermostatic valve and S956 volume control valve

OPERATION

- Flow lever operates counterclockwise through a 90 degree arc with off at 6 o'clock and maximum flow at the 3 o'clock position. Shut off in clockwise direction
- Temperature lever operates through a 340 degree arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 105 degrees F (41degrees C)
- Safety stop override allows maximum temperature at 120 degrees F (49 degrees C)
- Factory established temperature range from 70 degrees F (21 degrees C) to 120 degrees F (49 degrees C)

FLOW

- Showerhead and handshower are limited to 2.5 gpm max (9.5 L/min)
- Bodysprays are limited to 1.75 gpm each (6.6 L/min)

CARTRIDGE


- 130156 thermostatic cartridge design with non metallic/nonferrous materials
- 130157 volume ceramic disc cartridge design

STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including ASSE1016 and ASSE1014
- **ADA**  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

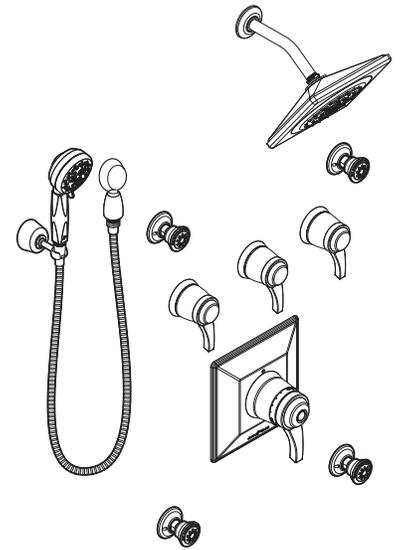


Divine™

ExactTemp® 3/4" Thermostatic Vertical Spa Trim

Models: TS556, TS556BN, TS556HN

Valves: S936 - thermostatic
S956 - volume

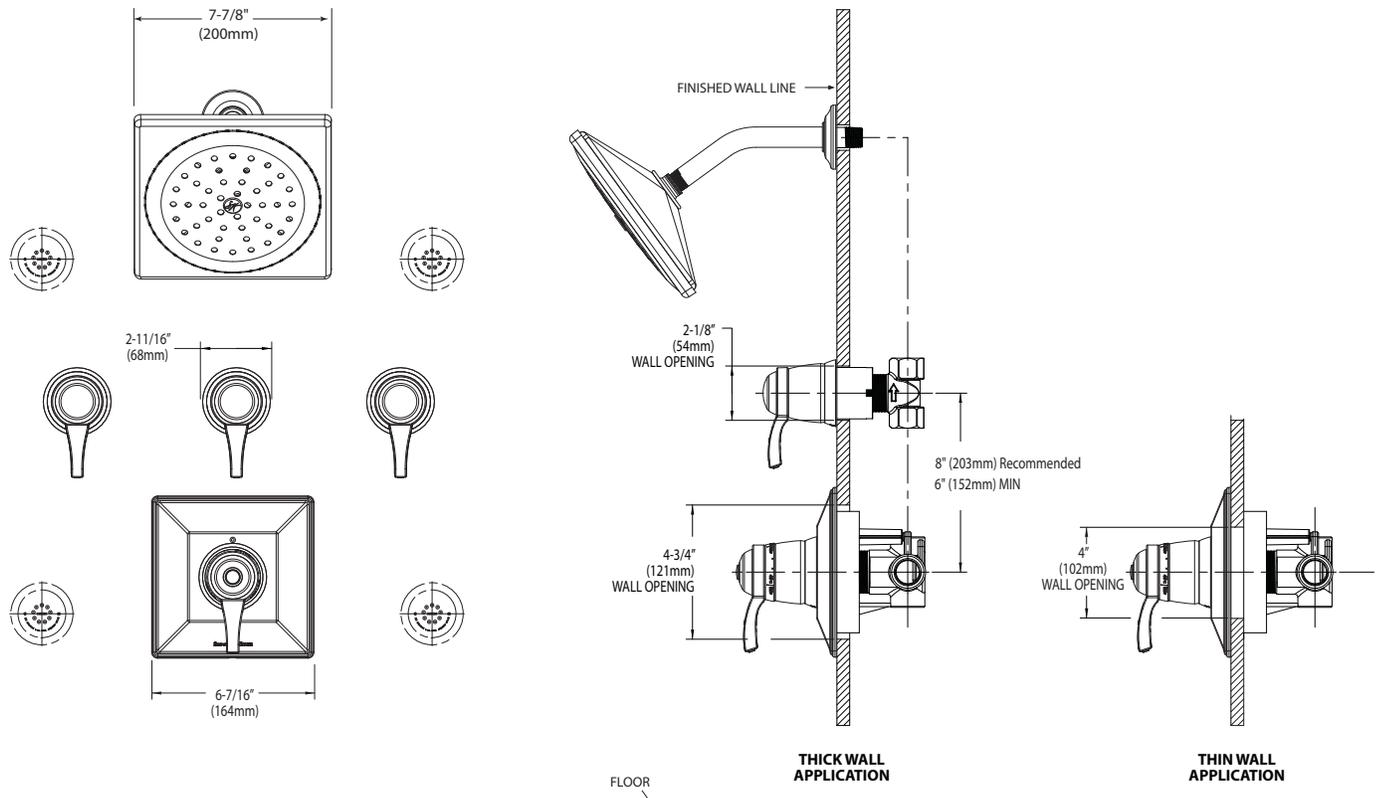

CRITICAL DIMENSIONS

(DO NOT SCALE)

DESCRIPTION

- Metal construction with a chrome plated, LifeShine[®] brushed nickel or LifeShine[®] hammered nickel finish
- For use with S956 3/4" volume control valve

OPERATION

- Lever style handle operation

STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein

WARRANTY



- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



**DIVINE™
Single Function Flow Valve Trim**

Models: TS554, TS556BN, TS554HN

Valve: S956

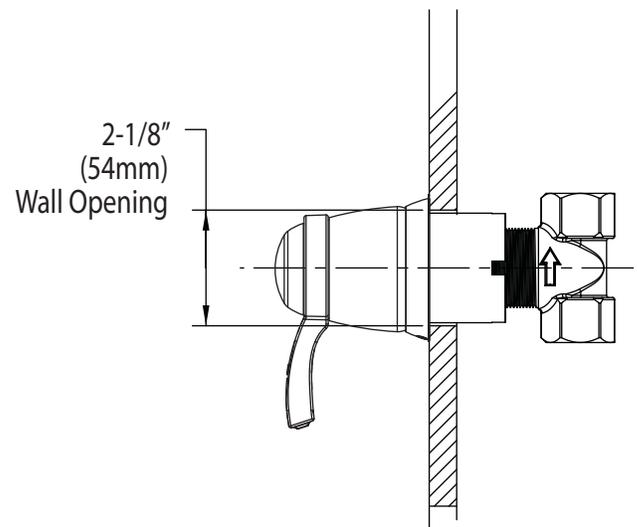

CRITICAL DIMENSIONS

(DO NOT SCALE)