

**Allure™ Single Handle Pull-Out
Kitchen Faucet
Model LK6140****FEATURES**



- Single hole top mount installation
 - 1/2" (13mm) diameter faucet hole required
 - Maximum countertop thickness 1-1/2" (38mm)
- Single-lever faucet with single stream pull-out spray
- 120° swing spout body with solid brass construction
- Removable ceramic disc cartridge
- Flexible supply tubes with 1/2" (13mm) male I.P.S. adapters.
- Available in the following colors & finishes
 - Chrome LK6140CR
 - Brushed nickel LK6140NK
- Ship Wt. 7.25 lbs. (3.3Kg)
- Due to the weight of this faucet, Elkay recommends that it be installed to an 18" (457mm) gauge stainless steel sink (or heavier) or to a solid surface countertop
- Maximum flow rate
 - 2.5 GPM/9.5 L/min at 80 P.S.I.G
 - 2.2 GPM/8.3 L/min at 60 P.S.I.G

WARRANTY

- Limited Lifetime


COMPLIES WITH:

- ANSI/NSF61-CERTIFIED
- ASME A112.18.1-05/CSA B125.1-2005-CERTIFIED
- CA AB1953/VT S152
- cUPC-CERTIFIED
- UPC-CERTIFIED

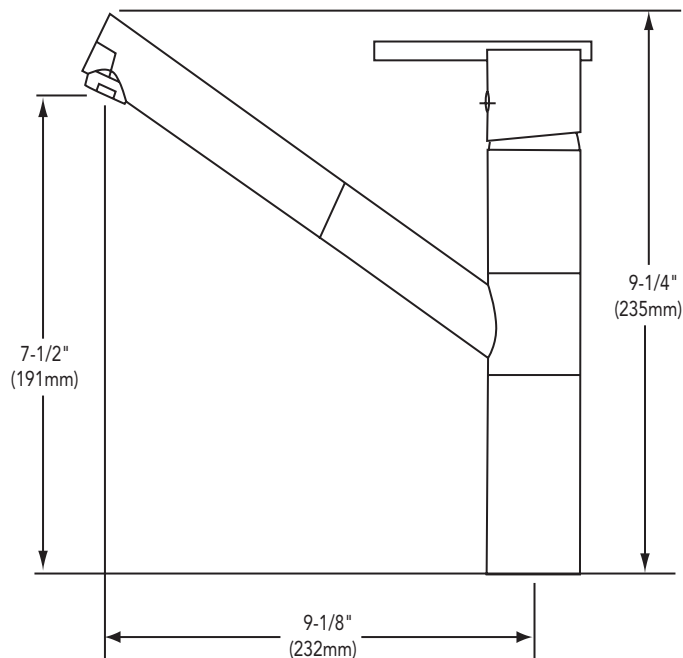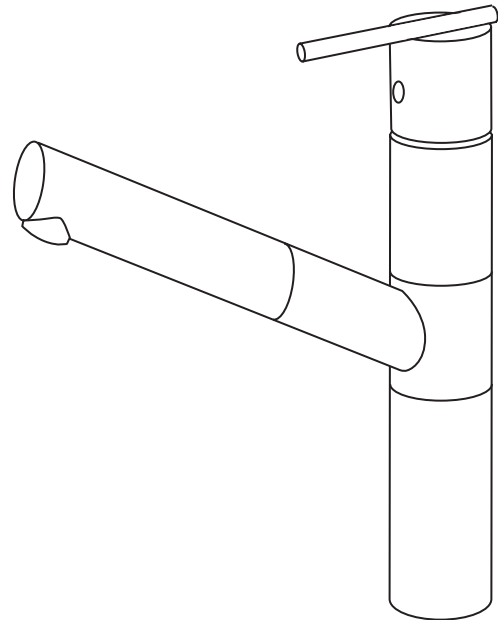

SEE OTHER SIDE FOR REPLACEMENT PARTS

Allure™ Single Handle Pull-Out Kitchen Faucet Model LK6140

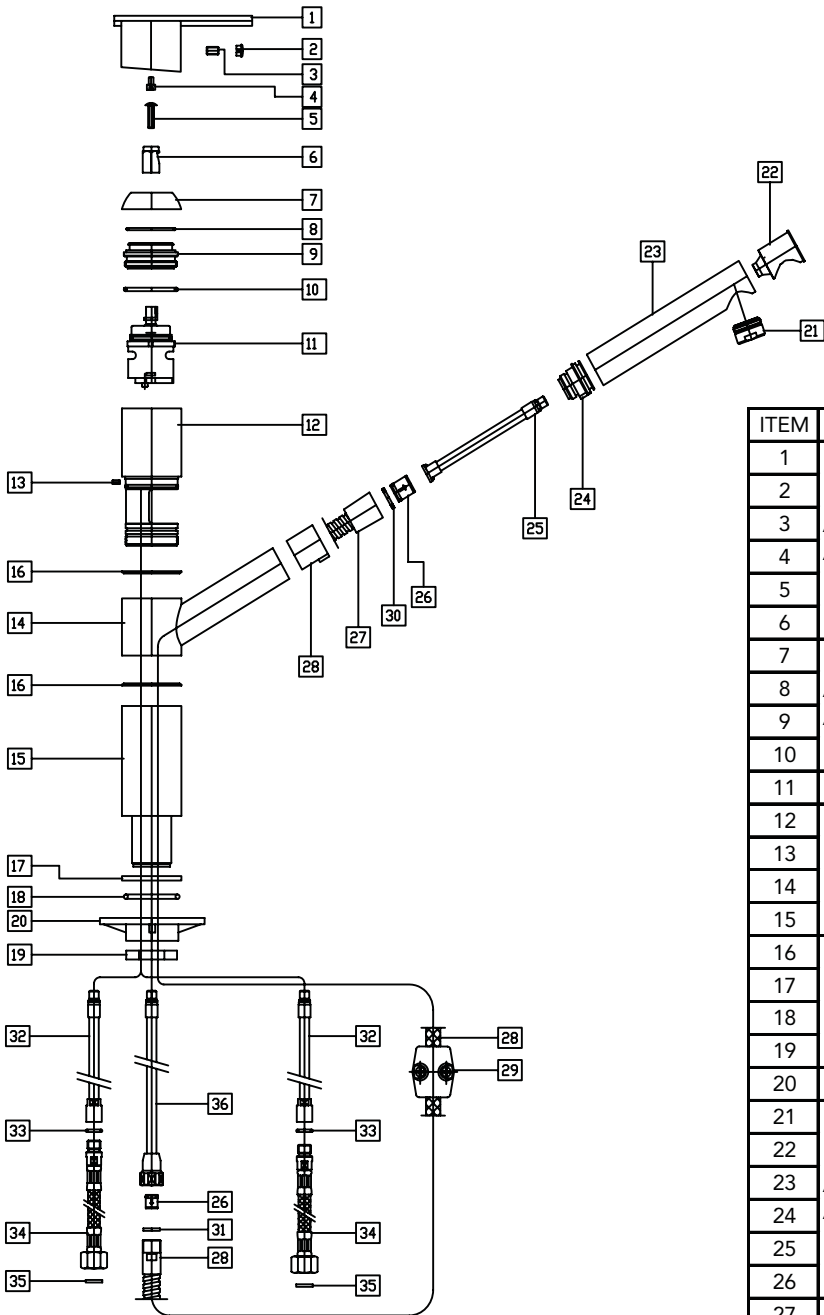

ITEM	PART	DESCRIPTION
1		
2		
3	A56058R - CHROME	LEVER HANDLE ASSEMBLY
4	A56063R - BRUSHED NICKEL	
5		
6		
7		
8	A56057R - CHROME	METAL WASHER/COVER
9	A56062R - BRUSHED NICKEL	
10		
11	A54236	CARTRIDGE
12		
13	N/A	N/A
14		
15		
16		
17	A56070R	FIXING KIT
18		
19		
20	N/A	N/A
21		
22		PULLOUT SPRAY
23	A56067R - CHROME	
24	A56072R - BRUSHED NICKEL	
25		
26		
27	A56068R	FLEX HOSE
28	A56066R	INSERT
29	A56069R	WEIGHT
30		
31	N/A	N/A
32		
33	A56071R	FLEX HOSE
34		
35	N/A	N/A
36		