


TORO

TEMPUS™ DC SERIES CONTROLLERS

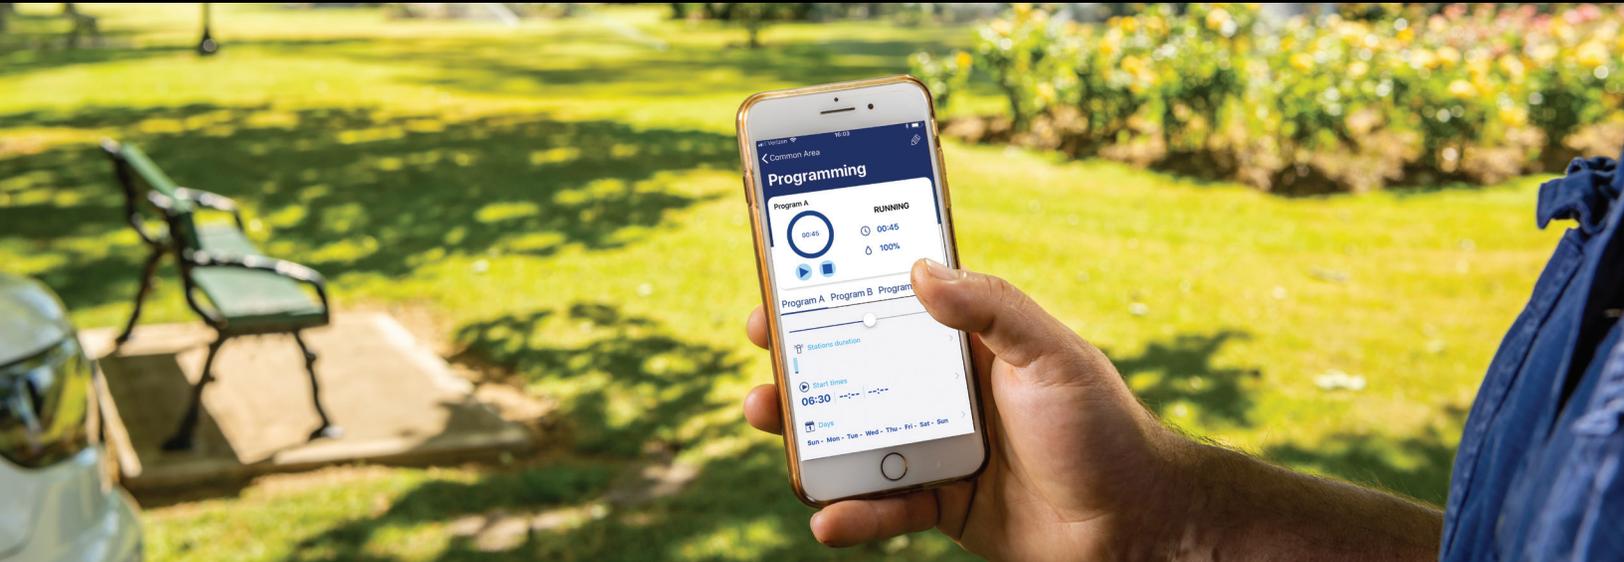

With its advanced features, the new TEMPUS DC battery-operated controller is ideal for managing irrigation in areas without an electrical connection. Wireless connectivity is integrated to allow intuitive programming through the new Toro TEMPUS DC mobile app. TEMPUS DC is completely waterproof and available both with or without an LCD screen.

FEATURES & BENEFITS

Saves Time

Easily access and program the TEMPUS DC battery-operated controller with your blue-tooth enabled smartphone or tablet through the free TEMPUS DC mobile app.

Rain Sensor Ready

Rain sensor compatibility ensures that irrigation does not occur during a rain event.

Water Savings

With water budget, seasonal irrigation can be easily set up for the whole year, and the run times can then be adjusted from 0% to 200% in increments of 10%.



TEMPUS™ DC Controller Features

- ✓ Simple and easy app navigation
- ✓ 1-, 2-, 4-, and 6-station models available
- ✓ Four independent watering programs with three start times per program
- ✓ Watering schedule by 7 day calendar, day interval or odd/even days
- ✓ Automatic program stacking in cases of start time and/or runtime overlap
- ✓ Run times up to 8 hours with 1 minute increment
- ✓ Permanent program retention in memory without battery
- ✓ Automatically stops active irrigation in the event the battery power level falls below minimum operating requirements.
- ✓ Waterproof (IP68) and submersible up to 6½ feet
- ✓ Input for a wired rain sensor

TEMPUS DC LCD CONTROLLER MODEL LIST

Model	Description
TEMP-1-DC-L	1-Station Controller
TEMP-2-DC-L	2-Station Controller
TEMP-4-DC-L	4-Station Controller
TEMP-6-DC-L	6-Station Controller

TEMPUS NON-LCD CONTROLLER MODEL LIST

Model	Description
TEMP-1-DC	1-Station Controller
TEMP-2-DC	2-Station Controller
TEMP-4-DC	4-Station Controller
TEMP-6-DC	6-Station Controller

SPECIFICATIONS

Dimensions & Weights

- TEMPUS DC with LCD: 4.1" x 6.1" x 1.9" (W x H x D) / 0.57 pounds
- TEMPUS DC without LCD: 4.5" x 4.5" x 1.9" (W x H x D) / 0.55 pounds

Power

- 1 x 9V or 4 x 1.5V AAA batteries
- Compatible with Toro®, Irritrol®, and Hunter® DC latch-type solenoids
- Maximum 1 station ON at a time
- Valve wire runs up to 325 feet (20 AWG wire)

Working Pressure



- Qualified on DCL samples up to 85 psi of water pressure

Working Temperature

- From 14°F to 122°F

Warranty

- 2 years

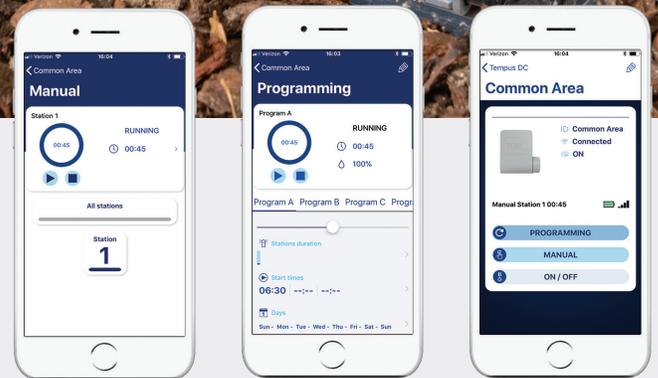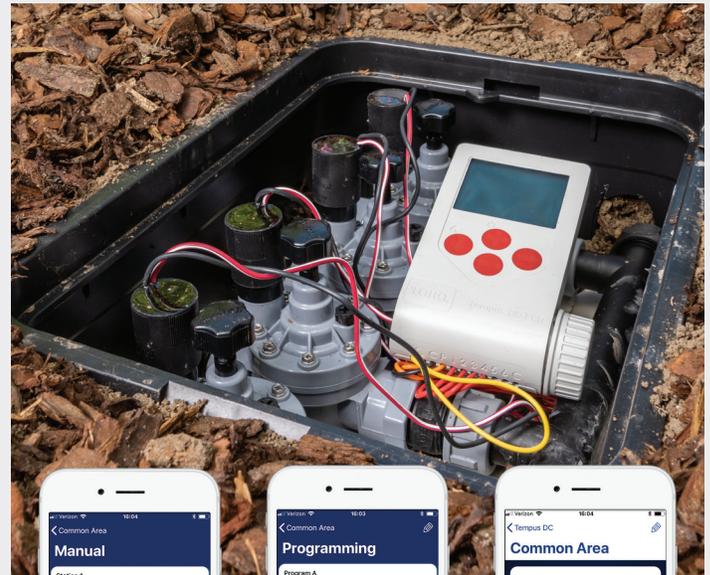

Actual app screens.

Specifying Information – TEMPUS DC Controller

XXX-XXX		
Tempus Controller	Station Count	Interface
X	X	DC
TEMP	1 - 1-Station 2 - 2-Station 4 - 4-Station 6 - 6-Station	L - with LCD screen (Blank) - no screen

Example: A 2-station Tempus DC controller with an LCD interface would be specified as: **TEMP-2-DC-L**



www.toro.com

The Toro Company • Irrigation Business • 5825 Jasmine St. Riverside, CA • 92504 • 877-345-8676

Specifications subject to change without notice. For more information, contact your local Toro distributor. ©2022 The Toro Company. All rights reserved.

P/N 22-1192-IRC