

Keane® Single-Handle Lavatory Faucet

FEATURES

- WaterSense® certified low-flow 1.2 gpm (4.5 lpm) faucet
- Lever handle
- Brass construction
- Ceramic disk mixing cartridge
- Metal pop-up drain assembly included

COLORS/FINISHES

- #CP Polished Chrome
- #BN Brushed Nickel



OPTIONAL ACCESSORIES

- THP3158#CP – 4" Cover Plate
- THP3159#CP – 8" Cover Plate

PRODUCT SPECIFICATION

Product shall have a maximum flow rate of 1.2 gpm (4.5 lpm). Product shall have lever handles. Product shall have a brass construction. Product shall have a ceramic disk mixing cartridges. Product shall include metal pop-up drain assembly. Product shall be TOTO Model TL211SD12R# ____.

CODES/STANDARDS

- Meets or exceeds ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61-9, NSF/ANSI/CAN 372
- Certifications: IAPMO(cUPC), EPA WaterSense, State of Massachusetts and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, CEC, DoE, California Green Building Code, City of Los Angeles Water Efficiency Ordinance, City of New York and others
- Complies with federal and state requirements for low-lead legislation
- ADA compliant
- Complies with CA Prop 65 warning requirements
- Meets or exceeds California AB100 Law that requires lead content less than 1ppb




TL211SD12R


Keane® Single-Handle Lavatory Faucet

SPECIFICATIONS

Material	Brass
Maximum Flow Rate	1.2 gpm (4.5 lpm)
Warranty	Lifetime Limited Warranty (Residential Use) One Year (Commercial Use)
Shipping Weight	5.2 lbs
Shipping Dimensions	15" L x 7-3/4" W x 3" H

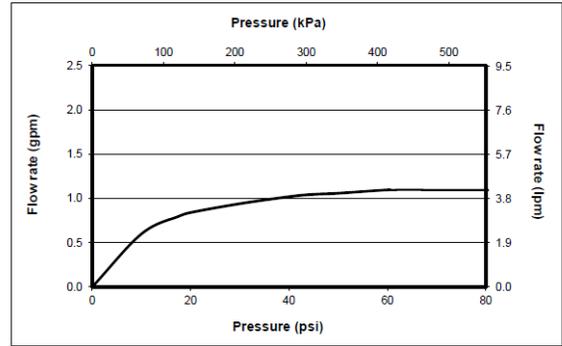

DIMENSIONS

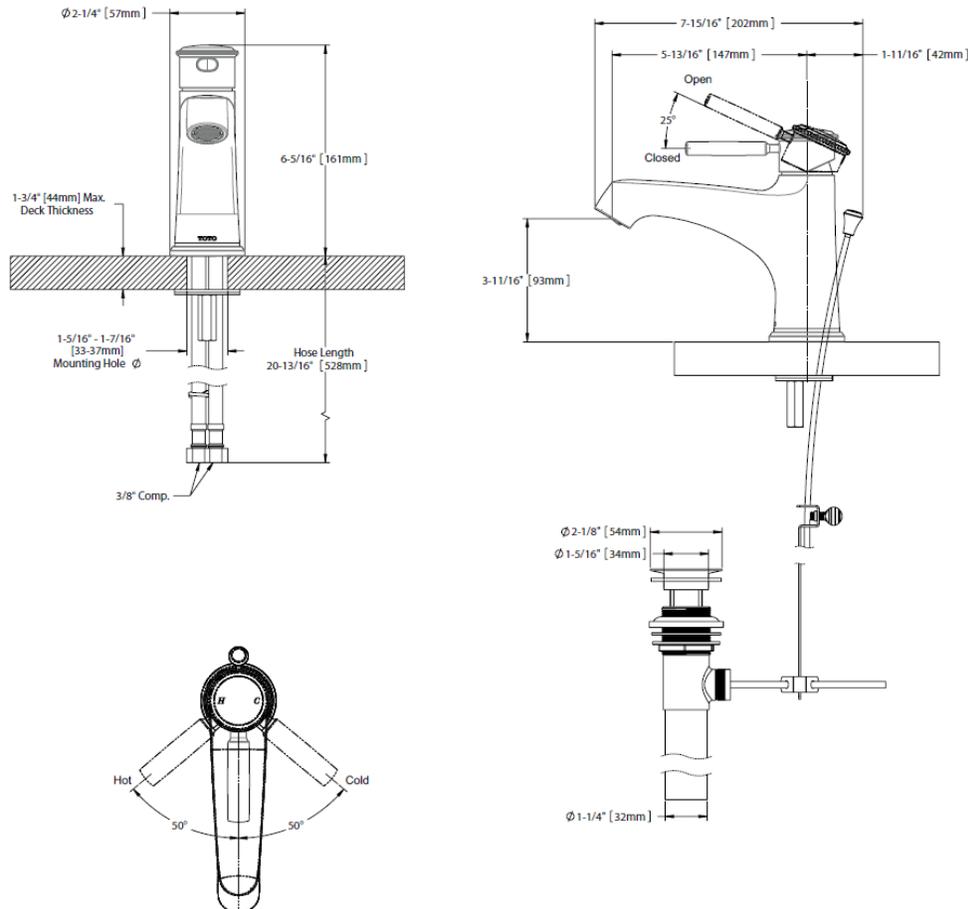

TOTO®

These dimensions and specifications are subject to change without notice