

REGULATORS

Part#

Description

Application

A. F273766




Propane Auto-Changeover Two Stage Regulator (with cover & bracket)

(Two 1/4" Inverted Female Flare Inlets x 3/8" Female Pipe Outlet)

Most commonly used on RV's with dual tank hook-up.

Features:

- 300 BTU Capacity • 11" W.C. Setting
- 1/2 PSI Output • Automatic Changeover
- Visible Gauge • Automatically changes over from empty tank to full one
- Can remove empty cylinder and take for refill without interruption
- Gas gauge for monitoring
- Pressure consistency through dual regulators
- * Brass inverted fitting are not removable

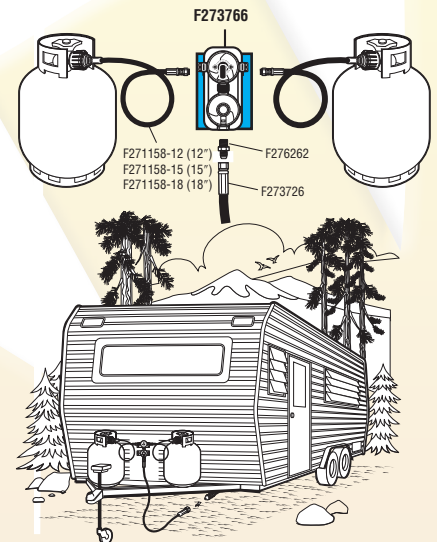

B. F273863 (With P.O.L.)




Horizontal Propane Two-Stage Regulator

Excess Flow Soft Nose P.O.L. (Inlet) x 3/8" Female Pipe Thread (Outlet)

Features:

- Two-stage regulator results in a more consistent inlet pressure between the first and second stage. This allows for a more consistent flow of gas to the appliance.
- 275,000 BTU Capacity
- Outlet pressure set at 11" W.C.
- Operating Temperature: -20°C - 50°C

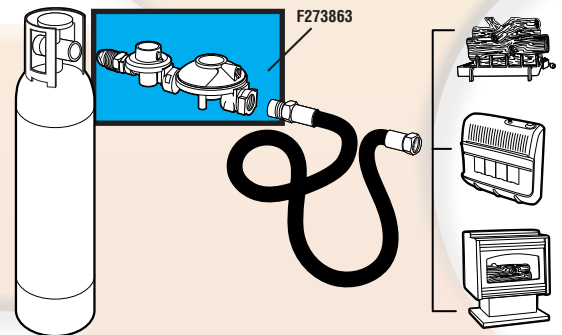

C. F273868 (Without P.O.L.)



D. F273763



Propane Two-Stage Regulator

(1/4" Female Pipe Thread (Inlet) x 3/8" Female Pipe Thread (Outlet))

Features:

- Low Pressure
- Consistent Gas Pressure
- 11" W.C. Setting
- 1/2 PSI Output
- Operating Temperature: -20°C - 50°C

