

Backflow Protection
If your product is not equipped with backflow prevention, in order to make your product backflow compliant, a vacuum breaker will need to be added.

CLEANING AND CARE
Care should be given to the cleaning of this product. Although its finish is extremely durable, it can be damaged by harsh abrasives or polish. To clean, simply wipe gently with a damp cloth and blot dry with a soft towel.

Limited Warranty on Delta® Faucets

Parts and Finish: All parts (other than electronic parts and batteries) and finishes of Delta® faucets purchased from authorized Delta sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet was first installed. For commercial purchasers, (a) the warranty period is ten (10) years for multi-family residential applications and (b) five (5) years for all other commercial applications, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). For purposes of this warranty, the term "multi-family residential application" refers to the purchase of the faucet from an authorized Delta seller by a purchaser who owns but does not live in the residential dwelling in which the faucet is initially installed, such as in a rented or leased single unit or multi-unit detached home (duplex or townhome), or a condominium, apartment building or community living center. The following installations are not considered multi-family residential applications, are excluded from the 10-year warranty and are subject to the 5-year warranty: industrial, institutional or other business premises, such as a dormitory, hospitality premises (hotel, motel or extended stay location), airport, educational facility, long- or short-term healthcare facility (hospital, rehabilitation center, nursing, assisted or staged-care living unit), public space or common area.

Parts and Finish for Delta® Recertified Faucets: Delta Faucet Company offers for sale online Delta® Recertified faucets. Delta® Recertified faucets only include faucets that have been certified as such by Delta Faucet Company. All parts (other than electronic parts and batteries) and finishes of these Delta® Recertified faucets are warranted to the original consumer purchaser to be free from defects in material and workmanship for ten (10) years from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). For commercial purchasers, the warranty period is one (1) year from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).

Electronic Parts: Electronic parts (other than batteries), if any, of Delta® faucets purchased from deltafaucet.com or authorized Delta sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for five (5) years from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.) or, for commercial purchasers, for one (1) year from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.

What We Will Do: Delta Faucet Company will repair or replace, free of charge, during the applicable warranty period (as described above), any part or finish that proves defective in material and/or workmanship under normal installation, use and service. Delta Faucet Company may, in its sole discretion, use new, refurbished or recertified parts or products for such repair or replacement. If repair or replacement is not practical, Delta Faucet Company may elect to refund the purchase price in exchange for the return of the product. **These are your exclusive remedies.**

What Is Not Covered: Because Delta Faucet Company is unable to control the quality of Delta products sold by unauthorized sellers, unless otherwise prohibited by law, this warranty does not cover Delta products purchased from unauthorized sellers. Any labor charges incurred by the purchaser to repair, replace, install or remove this product are not covered by this warranty. Delta Faucet Company shall not be liable for any damage to the faucet resulting from reasonable wear and tear, outdoor use, misuse (including use of the product for an unintended application), freezing water, abuse, neglect or improper or incorrectly performed installation, maintenance or repair, including failure to follow the applicable care and cleaning instructions. Delta Faucet Company recommends using a professional plumber for all installation and repair of faucets. We also recommend that you use only genuine Delta® replacement parts.

What You Must Do To Obtain Warranty Service or Replacement Parts: A warranty claim may be made and replacement parts may be obtained by calling 1 800 345 DELTA (3358) or by contacting us by mail or online as follows (please include your model number, date of original purchase and documentation of the date of receipt of the product by the original purchaser or their authorized representative (installation contractor, etc.):)

In the United States and Mexico:
Delta Faucet Company
55 E. 111th Street
Indianapolis, IN 46280
Attention: Warranty Service
www.deltafaucet.com/service-parts/contact-us

In Canada:
Masco Canada Limited, Plumbing Group
Technical Service Centre
350 South Edgeware Road
St. Thomas, Ontario, Canada N5P 4L1
Attention: Customer Service
<http://www.deltafaucet.ca/customersupport/assistance.html>

Proof of purchase (original sales receipt showing purchase date) and documentation of the date of receipt of the product by the original purchaser or their authorized representative (installation contractor, etc.) from the original purchaser must be made available to Delta Faucet Company for all warranty claims unless the purchaser has registered the product with Delta Faucet Company or the product is a Delta® Recertified product purchased from deltafaucet.com. This warranty applies only to Delta® faucets manufactured after January 1, 2019 and installed in the United States of America, Canada and Mexico.

Limitation on Duration of Implied Warranties: Please note that some states/provinces (including Quebec) do not allow limitations on how long an implied warranty lasts, so the below limitations may not apply to you. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, ANY IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND OF FITNESS FOR A PARTICULAR PURPOSE, IS LIMITED TO THE STATUTORY PERIOD OR THE DURATION OF THIS WARRANTY, WHICHEVER IS SHORTER.

Limitation of Special, Incidental or Consequential Damages: Please note that some states/provinces (including Quebec) do not allow the exclusion or limitation of special, incidental or consequential damages, so the below limitations and exclusions may not apply to you. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS WARRANTY DOES NOT COVER, AND DELTA FAUCET COMPANY SHALL NOT BE LIABLE FOR, ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING LABOR CHARGES TO REPAIR, REPLACE, INSTALL OR REMOVE THIS PRODUCT), WHETHER ARISING OUT OF BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, BREACH OF CONTRACT, TORT, OR OTHERWISE. DELTA FAUCET COMPANY SHALL NOT BE LIABLE FOR ANY DAMAGE TO THE FAUCET RESULTING FROM REASONABLE WEAR AND TEAR, OUTDOOR USE, MISUSE (INCLUDING USE OF THE PRODUCT FOR AN UNINTENDED APPLICATION), FREEZING WATER, ABUSE, NEGLIGENCE OR IMPROPER OR INCORRECTLY PERFORMED INSTALLATION, MAINTENANCE OR REPAIR, INCLUDING FAILURE TO FOLLOW THE APPLICABLE INSTALLATION, CARE AND CLEANING INSTRUCTIONS. Notice to residents of the State of New Jersey: The provisions of this warranty, including its limitations, are intended to apply to the fullest extent permitted by the laws of the State of New Jersey.

Additional Rights: This warranty gives you specific legal rights, and you may also have other rights which vary from state/province to state/province. This is Delta Faucet Company's exclusive written warranty and the warranty is not transferable.

If you have any questions or concerns regarding our warranty, please contact us as provided above or view our Warranty FAQs at www.deltafaucet.com.

© 2023 Masco Corporation of Indiana

In2ition® Installation Instructions

Parts Included

Shower Head

Hand Shower

Flexible Hose

Hose Washer (3)

*WARNING: Plumbing Codes require that shower heads and hand showers provide a small but continuous flow of water (trickle) when in "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure variations in the water line and /or changes in the position of the shower temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.

ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold. DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.

1. Install the Shower Head

- Make sure to turn off water supply before installing the Shower Head.
- Remove existing Shower Head from Shower Arm.
- Apply plumbers tape to Shower Arm (not included), if necessary, to ensure leak free connection.
- Check to ensure washer is installed in the Shower Head prior to installation on Shower Arm.
- Hand tighten the Ball Connector of the Shower Head to the Shower Arm.

Notice: Removal of or tampering with the flow restrictor may result in showerhead failure and will void the warranty.

2. Install Hand Shower

- Place the hose washers into the hose nuts on each end of the hose.
- Connect one end of the Flexible Hose to the Shower Head. Connect the other end of the Flexible Hose to the Hand Shower. All connections should be able to be made by hand tightening.
- To change the Hand Shower spray selection, turn the lever (located on the front of the Hand Shower) left or right to the desired setting.

3. Insert Hand Shower into Shower Head

- Slide Hand Shower into the base of the Shower Head.

- Gently push the Hand Shower down into the Shower Head.

- If the Shower Head moves when removing the Hand Shower, hand tighten the connection between the Shower Head and the Shower Arm.

4. Changing Modes on the Shower Head

Turn knob on side of Shower Head to change between:

- Shower Head only
- Shower Head and Hand Shower
- Hand Shower only

5. Removing the Hand Shower from the Shower Head

- Push the lower part of the Hand Shower upwards, away from the Shower Head, releasing it from the Shower Head base

- Pull the Hand Shower away from the slot in the Shower Head.

6


75481 Rev. D

www.deltafaucet.com

1

03/15/2023 75481 Rev. D

Pièces incluses

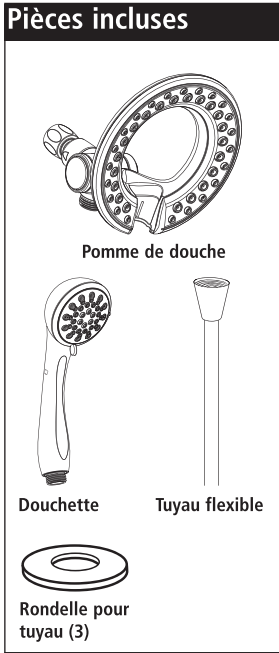

Pomme de douche

Douchette Tuyau flexible

Rondelle pour tuyau (3)

***AVERTISSEMENT :** Les codes de plomberie exigent que les pommes de douche et les douchettes laissent couler un filet d'eau, mince mais continu, lorsqu'elles sont en mode « PAUSE ». Étant donné cet écoulement continu, des variations de pression dans la conduite d'arrivée d'eau et/ou un déplacement de la poignée de commande de température alors que la douche est en mode « PAUSE » pourraient occasionner un changement important de la température lorsque la pomme de douche ou la douchette est remise en position « ON ». Dirigez TOUJOURS le jet d'eau de la pomme de douche loin de vous lorsque vous le remettez en position « ON », et vérifiez la température de l'eau avec la main avant de vous remettre sous la douche, pour vous assurer que l'eau n'est ni trop chaude, ni trop froide. NE permettez PAS aux enfants et aux autres personnes susceptibles de ne pas comprendre le présent avertissement d'utiliser la fonction « PAUSE ».


1. Installation de la pomme de douche



- Avant d'installer la pomme de douche, veuillez à couper l'alimentation en eau.
- Retirez la pomme de douche existante du bras de douche.
- Si nécessaire, appliquez le ruban d'étanchéité en PTFE sur le bras de douche pour assurer un raccord étanche.
- Avant d'installer la pomme de douche sur le bras de douche, assurez-vous que la rondelle a été installée dans la pomme de douche.
- Serrez à la main le joint entre le connecteur à bille de la pomme de douche et le bras de douche.


Note : La dépose ou la modification du limiteur de débit peut entraîner un bris de la pomme de douche et annuler la garantie.

2. Installation de la douchette

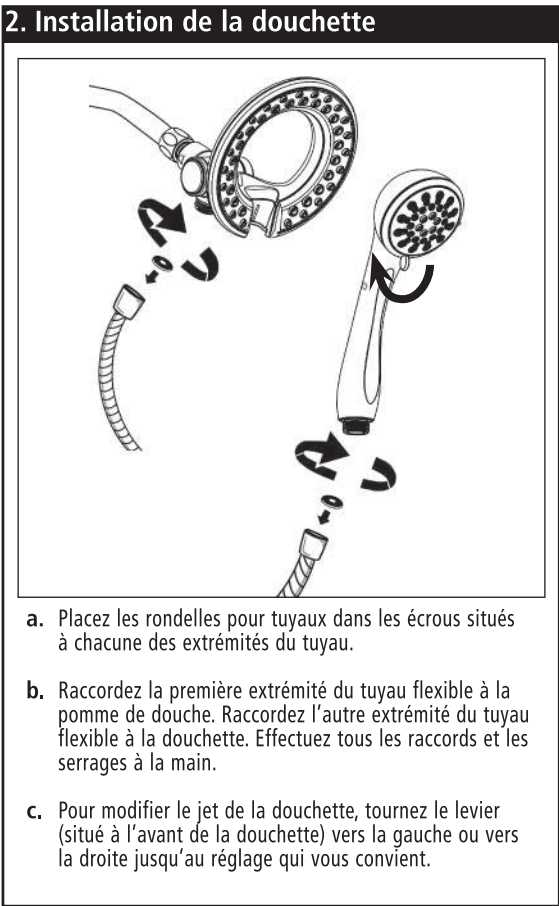

- Placez les rondelles pour tuyaux dans les écrous situés à chacune des extrémités du tuyau.
- Raccordez la première extrémité du tuyau flexible à la pomme de douche. Raccordez l'autre extrémité du tuyau flexible à la douchette. Effectuez tous les raccords et les serrages à la main.
- Pour modifier le jet de la douchette, tournez le levier (situé à l'avant de la douchette) vers la gauche ou vers la droite jusqu'au réglage qui vous convient.

4. Changement de mode sur la pomme de douche

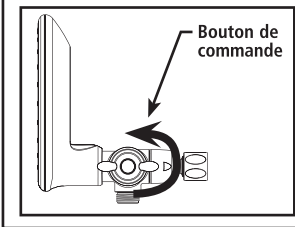


Bouton de commande

Tournez le bouton situé sur le côté de la pomme de douche pour passer en mode :

- Pomme de douche uniquement
- Pomme de douche et douchette
- Douchette uniquement

5. Retrait de la douchette de la pomme de douche

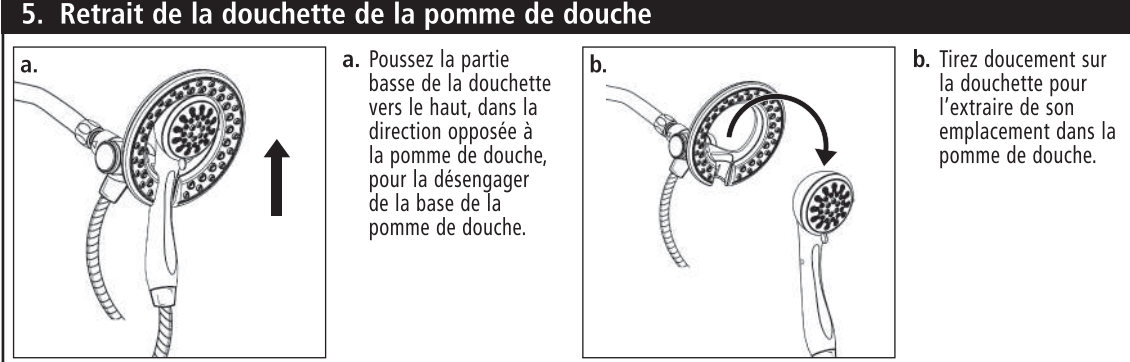

- Poussez la partie basse de la douchette vers le haut, dans la direction opposée à la pomme de douche, pour la désengager de la base de la pomme de douche.
- Tirez doucement sur la douchette pour l'extraire de son emplacement dans la pomme de douche.

Piezas incluidas



Cabeza de la regadera

Regadera de mano Manguera flexible

Rondana de manguera (3)

***ADVERTENCIA:** Los códigos de plomería requieren que las cabezas de regadera y las regaderas de mano proporcionen un flujo pequeño pero continuo de agua (hilo de agua) cuando funcionan en el modo de "PAUSA". Debido al flujo continuo, en ciertas ocasiones las variaciones de presión en la tubería de agua y/o los cambios de posición del asa de control de temperatura de la regadera mientras funciona en modo de "PAUSA" pueden ocasionar cambios importantes de la temperatura del agua cuando la cabeza de la regadera o la regadera de mano regresa a la posición de encendido "ON". SIEMPRE debe apuntar el cabezal de la regadera lejos de usted cuando la coloque nuevamente en la posición "ON". Recomendamos que toque el agua con la mano antes de reanudar la ducha para verificar que el agua no salga muy caliente ni muy fría. NO permita que los niños u otras personas que no comprendan esta advertencia usen la función "PAUSA".


1. Instale la cabeza de la regadera



- Antes de instalar, asegúrese de cerrar el suministro de agua.
- Quite el cabezal de la vieja regadera del brazo.
- Si es necesario, aplique cinta para plomero al brazo de la regadera (no se incluye) para garantizar una conexión sin fugas.
- Antes de instalar la regadera en el brazo, controle que la rondana se encuentre instalada correctamente en el cabezal.
- Apriete a mano el conector de bola del cabezal de la regadera al brazo de la regadera.


AVISO: El retiro o manipulación del limitador del flujo puede resultar en una falla de la cabeza de la regadera y anulará la garantía.

2. Instale la regadera de mano

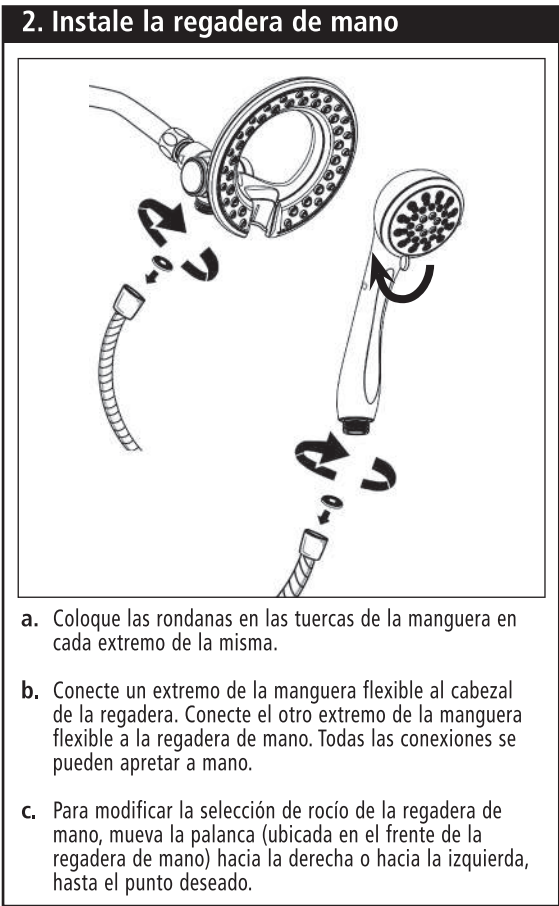

- Coloque las rondanas en las tuercas de la manguera en cada extremo de la misma.
- Conecte un extremo de la manguera flexible al cabezal de la regadera. Conecte el otro extremo de la manguera flexible a la regadera de mano. Todas las conexiones se pueden apretar a mano.
- Para modificar la selección de rocío de la regadera de mano, mueva la palanca (ubicada en el frente de la regadera de mano) hacia la derecha o hacia la izquierda, hasta el punto deseado.

4. Para cambiar los modos de la cabeza de la regadera

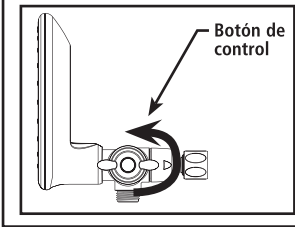


Botón de control

Gire el botón que se encuentra a un costado del cabezal de la regadera para cambiar entre los modos:

- Sólo el cabezal de la regadera
- Cabezal de la regadera y regadera de mano
- Sólo regadera de mano

5. Para quitar la regadera de mano de la cabeza de la regadera

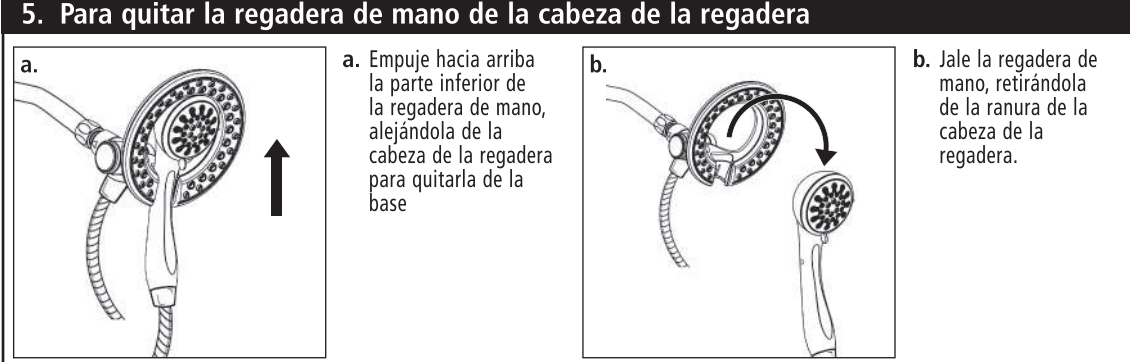

- Empuje hacia arriba la parte inferior de la regadera de mano, alejándola de la cabeza de la regadera para quitarla de la base
- Jale la regadera de mano, retirándola de la ranura de la cabeza de la regadera.