

Drum Machines



K-6200 DRUM MACHINE

- 3" to 6" (75 to 150 mm) Drain/Sewer Lines up to 200' (61 m).
- K-6200 machines offer superior maneuverability and a small footprint allows easy access to tight work areas. It comes equipped with either Inner Core cable or Integral Wound cable. Recommend 5/8" (16 mm) cable for 3" (75 mm) to 6" (150 mm) drain lines up to 200' (61 m).
- Cable Control System – causes the drum to stop spinning when the blade becomes lodged in a blockage, limits potential for cable to flip-over in the drum and helps indicate to operator when blockages are encountered.
- Direct Drive Design – 4/10 HP universal motor and gearbox bear down as torque builds. Motor tone lets operator know when blockage is encountered. Drum requires no adjustments to stay aligned and tight on drive shaft.
- Easy Maintenance Construction – Separate drum and machine in seconds. Inner drum and guide tube remove easily to maintain or replace cable.
- Designed Durable and Stable – Low center of gravity frame design and custom kickstand keep machine firmly anchored during operation. Rugged, corrosion-resistant polyethylene drum is rust and dent proof. Double tubular frame is lightweight and designed for extra strength.
- AUTOFEED® Control and Standard Accessories – Powerful feed mechanism is built to last and is easily maintained. AUTOFEED control, toolbox and selection of cutters included in all models.

SPECIFICATIONS

- Line Capacity – 3" - 6" (75-150 mm) Lines, up to 200' (61 m)
- Drum Capacity – 100' (30.5 m) of 5/8" (16 mm) cable
- Weight (Machine & 100' (30.5 m) of Cable) – 180 lbs. (81.6 kg)
- Size – Length 29 1/2" (75 cm, Height 43 1/2" (110 cm) (max.), Width 18 3/4", (47 cm)

MOTOR

- Type – 115V/60 Hz, 5.6 Amp, Reversible, Universal AC Motor
- Rating – 4/10 HP, 285 RPM

Machine Options

Catalog No.	Model No.	Description	Weight	
			lb	kg
93557	K-6200 with C-24 HD Cable	Machine, Standard Accessories and 5/8" x 100' (16 mm x 30.5 m) HD Solid Core Cable	180	81.8
95732	K-6200 with C-24	Machine, Standard Accessories and 5/8" x 100' (16 mm x 30.5 m) Inner Core Cable		
95737	K-6200	Machine with 5/8" (16 mm) Pigtail & Standard Accessories	98	44.5

Standard Equipment

Catalog No.	Description	93557 K-6200 w/C24 HD Cable	95732 K-6200 w/C-24	95737 K-6200
37643	5/8" (16 mm) x 100' HD Cable (30.5 m)	•		
43647	5/8" (16 mm) x 100' IC Cable (30.5 m)		•	
68623	Soft Sided Tool Bag	•	•	•
70032	RIDGID PVC Drain Cleaning Gloves	•	•	•
92495	Spade Cutter, 1 3/4" (45 mm)	•	•	•
92510	Double Cutter, 2" (50 mm)	•	•	•
92520	Double Cutter, 3" (75 mm)	•	•	•
92525	Double Cutter, 4" (110 mm)	•	•	•
92555	5/8" (16 mm) x 2' (50 mm) Leader	•	•	•



93557

Cables and Leaders

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	37628	C-25 HD	25' HD Cable (7.6 m)	24	10.9
	37633	C-26 HD	50' HD Cable (15.2 m)	43	19.5
	37638	C-27 HD	75' HD Cable (30.5 m)	63	28.6
	37643	C-24 HD	100 HD Cable (30.5 m)	84	38.1
	44122		5/8" (16 mm) Pigtail, 4 1/2' (1.4 m) Long	2 1/2	1.1
	58192	C-24HC	5/8" (16 mm) x 100' HC Cable (30.5 m)	70 1/2	32.1
	43647	C-24	5/8" (16 mm) x 100' IC Cable (30.5m)	84	38.1
	92460	C-25	5/8" (16 mm) x 25' IC Cable (7.6 m)	24	10.9
	92465	C-26	5/8" (16 mm) x 50' IC Cable (15.2 m)	43	19.5
	92470	C-27	5/8" (16 mm) x 75' IC Cable (22.9 m)	63	28.6
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2	0.8
	32737	C-27HC	5/8" (16 mm) x 75' HC Cable (23 m)	52 3/4	23.9

Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

	Catalog No.	Model No.	Description	Replac. Blade(s)	Replac. Holder
	51762R	T-409	H-D Bulb Auger, 1 3/4" (45 mm)	-	-
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 3/4" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 9/16" (65 mm)	-	-
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 1/2" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895
	59230	A-13	3/8" Cable Pin Key	-	-

Accessories

Catalog No.	Description
92540	3-Blade Cutter 3" (75 mm)
49032	Front Guide Hose Assembly
68623	Soft Sided Tool Bag
70032	RIDGID PVC Drain Cleaning Gloves
91047	5/8" IW Cable Repair Coupling
95792	Swivel Loading Wheel Assembly
95797	Lifting Hook - K-6200
95802	K-6200 Drum Assy. w/5/8" Pigtail
95807	K-3800 Drum Assy. w/6200 Adapters
95812	AUTOFEED® Assembly
95822	K-3800 to K-6200 Adapter Kit Only

Drum Machines



41977

K-750 DRUM MACHINE

- 3" to 8" (75 to 200 mm) Drain/Sewer Lines.
- Recommend 5/8" (16 mm) cable for 3" to 6" (75 to 150 mm) drain lines up to 150' (48 m).
- Recommend 3/4" (20 mm) cable for 4" to 8" (100 to 200 mm) drain lines up to 200' (62 m).
- Powerful, self-contained machine ideal for lateral lines. Easy to transport, minimal set-up – attach a tool and go.
- AUTOFEED® control advances and retrieves cable with a push of a lever, up to 20' (6 m) per minute.
- Versatile AUTOFEED control adjusts for either 5/8" (16 mm) or 3/4" (20 mm) cable with a twist of a screwdriver.
- Tough, corrosion-resistant cable drum withstands harsh treatment and abuse. It will not dent or corrode and cleans easily.
- Drum holds 100' (30.5 m) of 3/4" (20 mm) or 125' (35 m) of 5/8" (16 mm) cable and is designed for quick, easy removal.
- Balanced design gives the machine a lightweight "feel." Transport wheels ease loading into service truck/van.
- Equipped with 1/2 HP induction motor that spins cable at 200 RPM.
- Includes RIDGID PVC drain cleaning gloves and operators manual.

Machine Options

Catalog No.	Model No.	Description	Voltage	Weight	
			V	lb	kg
41977	K-750	Machine with Gloves and AUTOFEED - 3/4" (20 mm) Pigtail	120V, 50/60 Hz	114	51.9
51402		Machine with Gloves and AUTOFEED - 5/8" (16 mm) Pigtail	120V, 50/60 Hz	113	51.3
42002	K-750 with C-75	Machine with One Pair of Gloves, AUTOFEED, Standard 3/4" (20 mm) Tool Set, and: C-75, 75' (23 mm) x 3/4" (20 mm) Cable	120V, 50/60 Hz	206	93.6
42007	K-750	Machine with One Pair of Gloves, w/C-100 AUTOFEED, Standard 3/4" (20 mm) Tool Set, and: C-100, 100' (30.5 mm) x 3/4" (20 mm) Cable	120V, 50/60 Hz	234	106.3
42012	K-750 with C-27	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" (16 mm) Tool Set, and: C-27, 75' (23 mm) x 5/8" (16 mm) Cable	120V, 50/60 Hz	182	82.7
47047	K-750 with C-24	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" (16 mm) Tool Set, and: C-24, 100' (30.5 mm) x 5/8" (16 mm) Cable	120V, 50/60 Hz		
44202	K-750	Machine with Gloves and AUTOFEED - 3/4" (20 mm) Pigtail	220 - 240V, 50/60 Hz	114	51.9
51407		Machine with Gloves and AUTOFEED - 5/8" (16 mm) Pigtail	220 - 240V, 50/60 Hz	113	51.3
44212		Machine with One Pair of Gloves, w/C-100 AUTOFEED, Standard 3/4" (20 mm) Tool Set, and: C-100, 100' (30.5 mm) x 3/4" (20 mm) Cable	220 - 240V, 50/60 Hz	234	106.3
44217	K-750 with C-27	Machine with One Pair of Gloves, AUTOFEED, Standard 5/8" (16 mm) Tool Set, and: C-27, 75' (23 mm) x 5/8" (16 mm) Cable	220 - 240V, 50/60 Hz	182	82.7

Standard Equipment

Catalog No.	Description	41977 K-750	51402 K-750	42002 K-750 w/C-75	42007 K-750	42012 K-750 w/C-27	47047 K-750 w/C-24	44202 K-750	51407 K-750	44212 K-750	44217 K-750 w/C-27
41937	RIDGID Leather Drain Cleaning Gloves	•	•	•	•	•	•	•	•	•	•
68623	Soft Sided Tool Bag	•	•	•	•	•	•	•	•	•	•
41212	3/4" (20 mm) x 75' IC Cable (22.9m)			•							
92495	Spade Cutter, 1 3/4" (45 mm)			•	•	•	•			•	•
92500	Retrieving Auger 2 5/8" (65 mm)			•	•	•	•			•	•
92510	Double Cutter, 2" (50 mm)			•	•	•	•			•	•
92520	Double Cutter, 3" (75 mm)			•	•	•	•			•	•
92525	Double Cutter, 4" (110 mm)			•	•					•	
41697	3/4" (20 mm) x 100' IC Cable (30.5m)				•					•	
92470	5/8" (16 mm) x 75' IC Cable (22.9m)					•					•
92485	P-Trap Cutter, 3" (75 mm)					•	•				•
43647	5/8" (16 mm) x 100' IC Cable (30.5m)						•				

Inner Core (IC) Cables

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	92460	C-25	5/8" (16 mm) x 25' IC Cable (7.6 m)	24	10.9
	92465	C-26	5/8" (16 mm) x 50' IC Cable (15.2 m)	43	19.5
	92470	C-27	5/8" (16 mm) x 75' IC Cable (22.9 m)	63	28.6
	43647	C-24	5/8" (16 mm) x 100' IC Cable (30.5 m)	84	38.1
	37643	C-24HD	5/8" (16 mm) x 100' Heavy Duty Cable (30.5 m)	85	38.6
	92475	C-28	3/4" (20 mm) x 25' IC Cable (7.6 m)	30	13.9
	92480	C-29	3/4" (20 mm) x 50' IC Cable (15.2 m)	60	27.2
	41212	C-75	3/4" (20 mm) x 75' IC Cable (22.9 m)	93	42.5
	41697	C-100	3/4" (20 mm) x 100' IC Cable (30.5 m)	122	55.3

Hollow Core Cables

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	32737	C-27HC	5/8" (16 mm) x 75' HC Cable (23 m)	52 3/4	23.9
	58192	C-24HC	5/8" (16 mm) x 100' HC Cable (30.5 m)	70 1/2	32.1
	47427	C-75HC	3/4" (20 mm) x 75' HC Cable (23 m)	75	34.0
	47432	C-100HC	3/4" (20 mm) x 100' HC Cable (30.5 m)	100	45.5

Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2	0.9
	92560	T-468	3/4" (20 mm) x 2' (50 mm) Leader	2 3/4	1.3
	44122	-	5/8" (16 mm) Pigtail, 4 1/2' (1.4 m) Long	2 1/2	1.1
	44117	-	3/4" Pigtail Assembly	3 1/2	1.6

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	41982	A-7534	Drum Assembly with 3/4" (20 mm) Pigtail	37 1/2	17.0
	43637	A-7558	Drum Assembly with 5/8" (16 mm) Pigtail	33	15.0
	43642	A-75	AUTOFEED Assembly	8	3.5
	41937	-	RIDGID Leather Drain Cleaning Gloves	1/2	0.2
	41992	A-75PF	C-100IC Kit with Tools, 3/4" (20 mm) x 100' (30.5 m)	8	3.5
	49032	-	Front Guide Hose Assembly	3	1.3
	68623	-	Soft Sided Tool Bag	1.6	0.7
	70032	-	RIDGID PVC Drain Cleaning Gloves	1/2	0.2
	46015	-	Key, Hex 5/32	-	-

Repair Fittings

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	31487	A-7570	5/8" (16 mm) Repair Splicer	1 1/2	43.0
	31492	A-7571	3/4" (20 mm) Repair Splicer	2	57.0
	92805	A-6582	5/8" (16 mm) Male Coupling	1	28.0
	92810	A-6583	5/8" (16 mm) Female Coupling	2	57.0
	92880	B-6840	3/4" (20 mm) Male Coupling	1	28.0
	92885	B-6841	3/4" (20 mm) Female Coupling	2	57.0

Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

	Catalog No.	Model No.	Description	Replac. Blade(s)	Replac. Holder
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 3/4" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 1/8" (65 mm)	-	-
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	51762R	T-409	H-D Bulb Auger, 1 3/4" (45 mm)	-	-
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 1/2" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92985
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895


*STANDARD 3/4" (20 MM) TOOL SET INCLUDES

- T-406 Spade Cutter - 92495
- T-407 Retrieving Auger - 92500
- T-411 2" (50 mm) Cutter - 92510
- T-413 3" (75 mm) Cutter - 92520
- T-414 4" (110 mm) Cutter - 92525
- Hex Key - 46015

*STANDARD 5/8" (16 MM) TOOL SET INCLUDES

- T-403 3" (75 mm) P-Trap Cutter - 92485
- T-407 Retrieving Auger - 92500
- T-406 Spade Cutter - 92495
- T-411 2" (50 mm) Cutter - 92510
- T-413 3" (75 mm) Cutter - 92520
- Hex Key - 46015

*Sold Separately

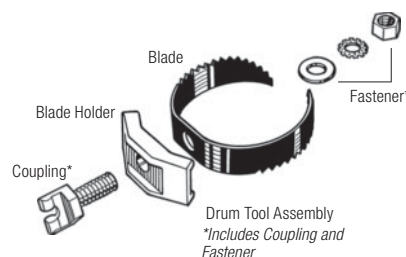

Drum Machines



59562

K-7500 DRUM MACHINE

- 3" to 10" (75-250 mm) Lines.
- Recommend $\frac{5}{8}$ " (16 mm) cable for 3" (75 mm) to 6" (150 mm) drain lines up to 250' (76 m).
- Recommend $\frac{3}{4}$ " (20 mm) cable for 4" (110 mm) to 10" (250 mm) drain lines up to 250' (76 m).
- Features performance, durability and maneuverability demanded by professional users. Ideal for tough jobs, such as roots.
- Powerful, yet quiet, 4/10 HP universal motor and gearbox spins cable at 200 RPM.
- Audible and visual signals for the operator.
- Main and inner drums won't rust, split or dent – ever. Cleans easily for professional appearance. Main drum holds up to 100' (30.5 m) of $\frac{3}{4}$ " (20 mm) cable, or 125' (38 m) of $\frac{5}{8}$ " (16 mm) cable.
- Powerful AUTOFEED® mechanism has grease fittings and an open design for easy maintenance. It advances and retrieves cable up to 22' (6.7 m) per minute.
- Two position stair climber eases transport and loading – to eliminate extra cost for loading wheels.
- Narrow profile lets the machine to fit through bathroom doors.
- Handles adjust to desired height to ensure balanced transport.
- Includes RIDGID PVC drain cleaning gloves and operator's manual.


Machine Options

Catalog No.	Model No.	Description	Voltage	Weight	
			V	lb	kg
59562	K-7500	Machine with $\frac{3}{4}$ " (20 mm) Pigtail and Standard Accessories	110 - 115V, 50/60 Hz	150	86.2
60052	K-7500 C-100	Machine, Standard Accessories, and $\frac{3}{4}$ " x 100' (20 mm x 30.5 m) Inner Core Cable.	110 - 115V, 50/60 Hz	272	123.7
60062R	K-7500 w/C-75	Machine, Standard Accessories, and $\frac{3}{4}$ " x 75' (20 mm x 22.9 m) Inner Core Cable.	110 - 115V, 50/60 Hz	244	110.9
61102	K-7500	Machine with $\frac{5}{8}$ " (16 mm) Pigtail and Standard Accessories	110 - 115V, 50/60 Hz	149	67.8
61522		Machine with $\frac{5}{8}$ " (16 mm) Pigtail and Standard Accessories	220 - 240V, 50/60 Hz		
61542		Machine with $\frac{3}{4}$ " (20 mm) Pigtail and Standard Accessories	220 - 240V, 50/60 Hz	150	86.2

Standard Equipment

Catalog No.	Description	59562 K-7500	60052 K-7500 C-100	60062R K-7500 w/C-75	61102 K-7500	61522 K-7500	61542 K-7500
68623	Soft Sided Tool Bag	•	•	•	•	•	•
69250	$\frac{3}{16}$ " Hex Wrench	•	•	•	•	•	•
70032	RIDGID PVC Drain Cleaning Gloves	•	•	•	•	•	•
92485	P-Trap Cutter, 3" (75 mm)	•	•	•	•	•	•
92495	Spade Cutter, 1 $\frac{3}{4}$ " (45 mm)	•	•	•	•	•	•
92500	Retrieving Auger 2 $\frac{5}{16}$ " (65 mm)	•	•	•	•	•	•
92505	Sawtooth Cutter, 3" (75 mm)	•	•	•	•	•	•
92510	Double Cutter, 2" (50 mm)	•	•	•	•	•	•
92520	Double Cutter, 3" (75 mm)	•	•	•	•	•	•
92560	$\frac{3}{4}$ " (20 mm) x 2' (50 mm) Leader	•	•	•			•
92830	4" Double Cutter (Blade Only)	•	•	•	•	•	•
92855	6" Double Cutter (Blade Only)	•	•	•	•	•	•
41697	$\frac{3}{4}$ " (20 mm) x 100' IC Cable (30.5 m)		•				
41212	$\frac{3}{4}$ " (20 mm) x 75' IC Cable (22.9m)			•			

Cable Control & Performance – When Tool Engages Tough Obstructions

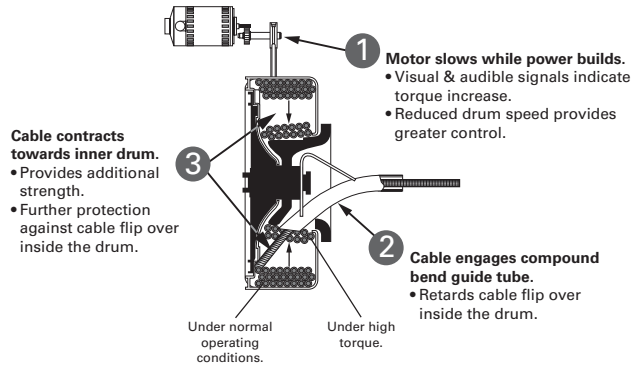

Visit RIDGID.com for the full instruction manual.

Accessories

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	41937	-	RIDGID Leather Drain Cleaning Gloves	1/2	0.2
	41992	A-75PF	C-100IC Kit with Tools, 3/4" (20 mm) x 100' (30.5 m)	8	3.5
	49032	-	Front Guide Hose Assembly	3	1.3
	68623	-	Soft Sided Tool Bag	1.6	0.7
	60032	A-75PF	AUTOFEED® Assembly	10	4.5
	60037R		AUTOFEED® Spacers (4)		
	60042	A-7534D	Drum Assembly w/3/4" (20 mm) Pigtail	31	14.0
	60047R	A-75DR	Drum Only	20	9.0
	61107	A-7558D	Drum Assembly w/5/8" (16 mm) Pigtail	30	13.6
	70032	-	RIDGID PVC Drain Cleaning Gloves	1/2	0.2
	31487	A-7570	5/8" (16 mm) Repair Splicer	3/32	0.0
	31492	A-7571	3/4" (20 mm) Repair Splicer	1/8	0.1
	92805	A-6582	5/8" (16 mm) Male Coupling	1/16	0.0
	92810	A-6583	5/8" (16 mm) Female Coupling	1/8	0.1
	92880	B-6840	3/4" (20 mm) Male Coupling	1/16	0.0
	92885	B-6841	3/4" (20 mm) Female Coupling	1/8	0.1

Inner Core (IC) Cables

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	92460	C-25	5/8" (16 mm) x 25' IC Cable (7.6 m)	24	10.9
	92465	C-26	5/8" (16 mm) x 50' IC Cable (15.2 m)	43	19.5
	92470	C-27	5/8" (16 mm) x 75' IC Cable (22.9 m)	63	28.6
	43647	C-24	5/8" (16 mm) x 100' IC Cable (30.5 m)	84	38.1
	92475	C-28	3/4" (20 mm) x 25' IC Cable (7.6 m)	30	13.9
	92480	C-29	3/4" (20 mm) x 50' IC Cable (15.2 m)	60	27.2
	41212	C-75	3/4" (20 mm) x 75' IC Cable (22.9 m)	93	42.5
	41697	C-100	3/4" (20 mm) x 100' IC Cable (30.5 m)	122	55.3

Hollow Core Cables

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	32737	C-27HC	5/8" (16 mm) x 75' HC Cable (23 m)	52 3/4	23.9
	58192	C-24HC	5/8" (16 mm) x 100' HC Cable (30.5 m)	70 1/2	32.1
	47427	C-75HC	3/4" (20 mm) x 75' HC Cable (23 m)	75	34.0
	47432	C-100HC	3/4" (20 mm) x 100' HC Cable (30.5 m)	100	45.5

Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2	0.9
	92560	T-468	3/4" (20 mm) x 2' (50 mm) Leader	2 3/4	1.3
	44122	-	5/8" (16 mm) Pigtail, 4 1/2' (1.4 m) Long	2 1/2	1.1
	44117		3/4" Pigtail Assembly	3 1/2	1.6

Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

	Catalog No.	Model No.	Description	Replac. Blade(s)	Replac. Holder
	51762R	T-409	H-D Bulb Auger, 1 3/4" (45 mm)	-	-
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 3/4" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 5/16" (65 mm)	-	-
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 1/2" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895

C-24, C-25, C-26, C-27, C-28, C-29, C-75, C-100, C-27HC, C-24HC, C-75HC and C-100HC.

Drum Machines



K-750R DRUM MACHINE

- 3" to 6" (75 mm to 150 mm) Drain Lines.
- The K-750R is a self-contained drain cleaner ideal for lateral drain lines from 3" to 6" (75 mm to 150 mm). Easy-to-transport, narrow design for small entry ways and minimal setup make this machine ideal for tough mainline work. Comes equipped with a large blade assortment to handle numerous applications. Clears roots, debris and foreign objects out of main lines, storm drains, house laterals and leach lines.
- Clear access to drum allows immediate view of cable for inspection plus easier and faster cleaning of drum and cable.
- Cable Control System – causes the drum to stop spinning when the blade becomes lodged in a blockage, limits potential for cable to flip-over in the drum and helps indicate to operator when blockages are encountered.
- New integral-wound, solid core cable is tough and kink resistant. 5/8" x 100' (16 mm x 30.5 m).
- Dual kickstands.
- Torque limiting feature.
- Lean, balanced design for easy one-man transport and operation.

SPECIFICATIONS

- Motor – 1/2 HP, 120V, 50/60Hz reversible induction motor, 200 RPM
- Control – Air activated foot switch

Catalog No.	Model No.	Description	Weight	
			lb	kg
83557	K-750R	5/8" (16 mm) Open Cage Drum Machine with 5/8" x 100' (16 mm x 30.5 m) IW Solid Core Cable; 2", 3", 4" "C" Cutters; P-Trap Cutter; Spade Blade; Tool Box; Gloves.	194	98.0

Standard Equipment

Catalog No.	Description	83557 K-750R
37753	5/8" x 100' Heavy Duty Inner Core Cable; Rental Tool; Special Coupling with Mounting Bolt	●
68623	Soft Sided Tool Bag	●
92485	P-Trap Cutter, 3" (75 mm)	●
92495	Spade Cutter, 1 3/4" (45 mm)	●
92510	Double Cutter, 2" (50 mm)	●
92520	Double Cutter, 3" (75 mm)	●
92525	Double Cutter, 4" (110 mm)	●



83557

Inner Core (IC) Cables

		Catalog No.	Model No.	Description	Weight	
					lb	kg
 5/8" -16 mm		92460	C-25	5/8" (16 mm) x 25' IC Cable (7.6m)	24	10.9
		92465	C-26	5/8" (16 mm) x 50' IC Cable (15.2m)	43	19.5
		92470	C-27	5/8" (16 mm) x 75' IC Cable (22.9m)	63	28.6
		43647	C-24	5/8" (16 mm) x 100' IC Cable (30.5m)	84	38.1
 3/4" -20 mm		92475	C-28	3/4" (20 mm) x 25' IC Cable (7.6m)	30	13.9
		92480	C-29	3/4" (20 mm) x 50' IC Cable (15.2m)	60	27.2
		41212	C-75	3/4" (20 mm) x 75' IC Cable (22.9m)	93	42.5
		41697	C-100	3/4" (20 mm) x 100' IC Cable (30.5m)	122	55.3

Hollow Core Cables

		Catalog No.	Model No.	Description	Weight	
					lb	kg
 5/8" -16 mm		32737	C-27HC	5/8" (16 mm) x 75' HC Cable (23 m)	52 3/4	23.9
		58192	C-24HC	5/8" (16 mm) x 100' HC Cable (30.5 m)	70 1/2	32.1
 3/4" -20 mm		47427	C-75HC	3/4" (20 mm) x 75' HC Cable (23 m)	75	34.0
		47432	C-100HC	3/4" (20 mm) x 100' HC Cable (30.5 m)	100	45.5

Tools and Replacement Blades – Fit 5/8" (16 mm) and 3/4" (20 mm) Cables

	Catalog No.	Model No.	Description	Replac. Blade(s)	Replac. Holder
	51762R	T-409	H-D Bulb Auger, 1 3/4" (45 mm)	-	-
	92485	T-403	P-Trap Cutter, 3" (75 mm)	92835	92900
	92490	T-404	P-Trap Cutter, 3 1/2" (87 mm)	92840	92900
	92495	T-406	Spade Cutter, 1 3/4" (45 mm)	92850	92915
	92500	T-407	Retrieving Auger 2 9/16" (65 mm)	-	-
	92505	T-408	Sawtooth Cutter, 3" (75 mm)	92890	92915
	92510	T-411	Double Cutter, 2" (50 mm)	92815	92905
	92515	T-412	Double Cutter, 2 1/2" (65 mm)	92820	92905
	92520	T-413	Double Cutter, 3" (75 mm)	92825	92910
	92525	T-414	Double Cutter, 4" (110 mm)	92830	92910
	92530	T-416	Double Cutter, 6" (150 mm)	92855	92910
	92535	T-432	3-Blade Cutter 2" (50 mm)	92860	92895
	92540	T-433	3-Blade Cutter 3" (75 mm)	92865	92895
	92545	T-434	3-Blade Cutter 4" (110 mm)	92870	92895
	92550	T-436	3-Blade Cutter 6" (150 mm)	92875	92895

Leaders and Pig Tails

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	92555	T-458	5/8" (16 mm) x 2' (50 mm) Leader	2	0.9
	92560	T-468	3/4" (20 mm) x 2' (50 mm) Leader	2 3/4	1.3
	44122	-	5/8" (16 mm) Pigtail, 4 1/2' (1.4 m) Long	2 1/2	1.1
	44117	-	3/4" Pigtail Assembly	3 1/2	1.6

Accessories

Catalog No.	Model No.	Description	Weight	
			lb	kg
41982	A-7534	Drum Assembly with 3/4" (20 mm) Pigtail	37 1/2	17.0
43637	A-7558	Drum Assembly with 5/8" (16 mm) Pigtail	33	15.0
43642	A-75	AUTOFEED Assembly	8	3.5
41937	-	RIDGID Leather Drain Cleaning Gloves	1/2	0.2
41992	A-75PF	C-100IC Kit with Tools, 3/4" (20 mm) x 100' (30.5 m)	8	3.5
49032	-	Front Guide Hose Assembly	3	1.3
68623	-	Soft Sided Tool Bag	1.6	0.7
70032	-	RIDGID PVC Drain Cleaning Gloves	1/2	0.2

Repair Fittings

	Catalog No.	Model No.	Description	Weight	
				lb	kg
	31487	A-7570	5/8" (16 mm) Repair Splicer	1 1/2	43.0
	31492	A-7571	3/4" (20 mm) Repair Splicer	2	57.0
	92805	A-6582	5/8" (16 mm) Male Coupling	1	28.0
	92810	A-6583	5/8" (16 mm) Female Coupling	2	57.0
	92880	B-6840	3/4" (20 mm) Male Coupling	1	28.0
	92885	B-6841	3/4" (20 mm) Female Coupling	2	57.0