


Hydraulic Royal® Prison Model Flushometer


9603



Water Closet

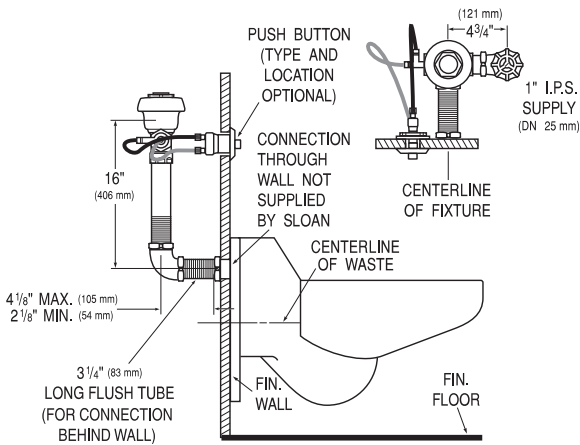

Combination Fixture

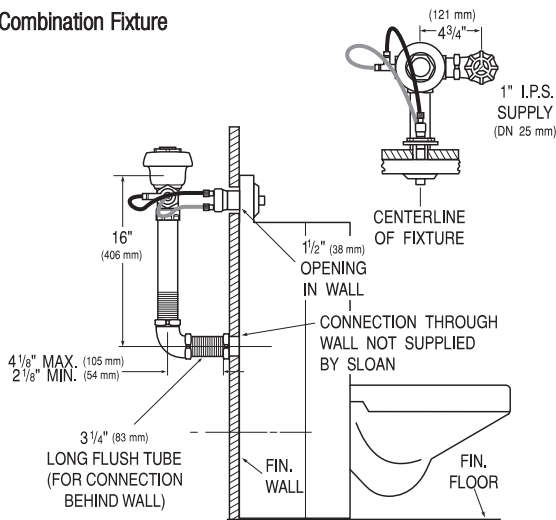

Description

Concealed Hydraulically Operated Water Closet Flushometer, for Stainless Steel back spud water closets and Combination Fixtures. For use with: Acorn® • Bradley® • Metcraft® • Willoughby® and similar fixtures.

Flush Cycle

- Model 9603 Water Saver (3.5 gpf/13.2 Lpf)
- Model 9603-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

Specifications

Quiet, Concealed, Diaphragm Type, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- PERMEX™ Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- ADA Compliant Non-Hold-Open Actuator (**specify Actuator type listed below**)
- 1" I.P.S. Wheel Handle Bak-Chek™ Angle Stop
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker
- Elbow Flush Connection and Coupling for 1½" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- Sweat Solder Adapter
- Exposed parts Chrome Plated
- Flush Accuracy Controlled by CID™ Technology
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID™ Technology
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX™ Rubber Compound for Chloramine Resistance
- 100% of the energy used in manufacturing is offset with Renewable Energy Sources – Wind Energy

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

Actuator Types: (please check one)

- MBFW** Metal Button Fixture Wall Actuator (HY-100-A) (rear access)
- MBPM** Metal Button Panel Mount (HY-108-A) for use only with Wall Box or when Access Panel is provided in combination fixture

See Hydraulic Flushometer Section of the Sloan catalog for details on Actuators.

Variations

- AFD** Shorter Vacuum Breaker - for use with Anti-Flood Device (Anti-Flood Device NOT provided by Sloan)
- TP** Trap Primer Elbow

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

Made In The
USA



Sloan Valve Company is buying renewable energy certificates to meet 100% of the company's purchased electricity use at its Franklin Park, Illinois facility.

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN

Made in the U.S.A.
SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131
Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380
<http://www.sloanvalve.com>

